

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 P Base NEMA Premium Efficiency Three-Phase      Product code : 14562032

Frame	: 326HP	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: W-6
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 283 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.3861 kgm <sup>2</sup>
Design	: B		

Output [HP]	50	40	40	40	50	50	50
Poles	4	4	4	4	4	4	4
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	118/59.2	58.7	57.1	56.4	71.6	68.4	66.3
L. R. Amperes [A]	734/367	376	400	417	372	397	411
LRC [A]	6.2x(Code G)	6.4x(Code G)	7.0x(Code H)	7.4x(Code J)	5.2x(Code E)	5.8x(Code F)	6.2x(Code G)
No load current [A]	47.0/23.5	23.0	24.0	25.0	23.0	24.0	25.0
Rated speed [RPM]	1775	1475	1477	1478	1460	1465	1470
Slip [%]	1.39	1.67	1.53	1.47	2.67	2.33	2.00
Rated torque [kgfm]	20.4	19.7	19.7	19.6	24.9	24.8	24.7
Locked rotor torque [%]	229	229	250	260	180	200	210
Breakdown torque [%]	270	260	300	330	200	240	260
Service factor	1.25	1.00	1.00	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	27s (cold) 15s (hot)	19s (cold) 11s (hot)	19s (cold) 11s (hot)	19s (cold) 11s (hot)	19s (cold) 11s (hot)	19s (cold) 11s (hot)	19s (cold) 11s (hot)
Noise level <sup>2</sup>	70.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)
Efficiency (%)	25%	0.000					
	50%	93.0	92.5	91.5	91.5	93.0	92.4
	75%	94.1	93.1	92.8	93.0	93.0	93.0
	100%	94.5	93.6	93.6	93.6	92.4	93.0
Power Factor	25%	0.00					
	50%	0.66	0.64	0.60	0.57	0.72	0.68
	75%	0.77	0.77	0.73	0.70	0.81	0.79
	100%	0.83	0.83	0.81	0.79	0.85	0.84

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	5.7	5.7	5.7	5.7	5.7	5.7
	P2 (0,5;1,0)	4.9	4.9	4.9	4.9	4.9	4.9
	P3 (0,25;1,0)	4.7	4.7	4.7	4.7	4.7	4.7
	P4 (0,9;0,5)	2.7	2.7	2.7	2.7	2.7	2.7
	P5 (0,5;0,5)	1.9	1.9	1.9	1.9	1.9	1.9
	P6 (0,5;0,25)	1.2	1.2	1.2	1.2	1.2	1.2
	P7 (0,25;0,25)	0.9	0.9	0.9	0.9	0.9	0.9

Bearing type	Drive end	6314 C3	Non drive end	6212 C3	Foundation loads Max. traction Max. compression
	Sealing	V'Ring	V'Ring		
	Lubrication interval	12000 h	15000 h		
	Lubricant amount	27 g	13 g		
	Lubricant type	Mobil Polyrex EM			

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		1 / 9	

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Notes  
USABLE @208V 131A SF 1.15 SFA 151A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 9	

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium Efficiency Three-Phase

Product code : 14562032

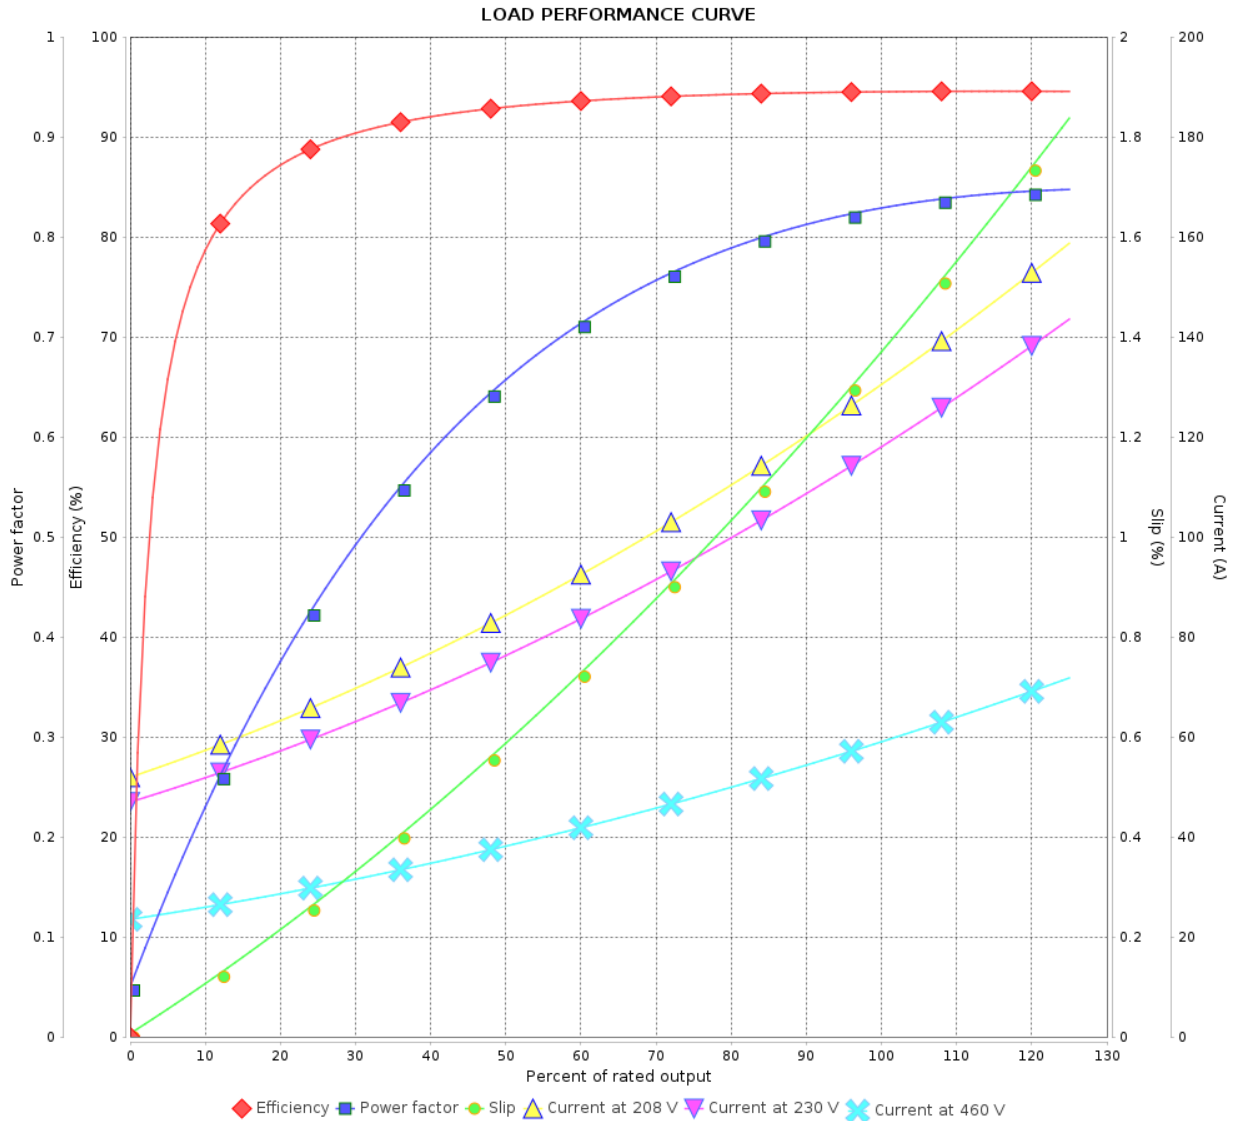

Performance : 230/460 V 60 Hz 4P

Rated current : 118/59.2 A  
 LRC : 6.2  
 Rated torque : 20.4 kgfm  
 Locked rotor torque : 229 %  
 Breakdown torque : 270 %  
 Rated speed : 1775 rpm

Moment of inertia (J) : 0.3861 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 9		
Date		15/01/2024		

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium Efficiency Three-Phase

Product code : 14562032

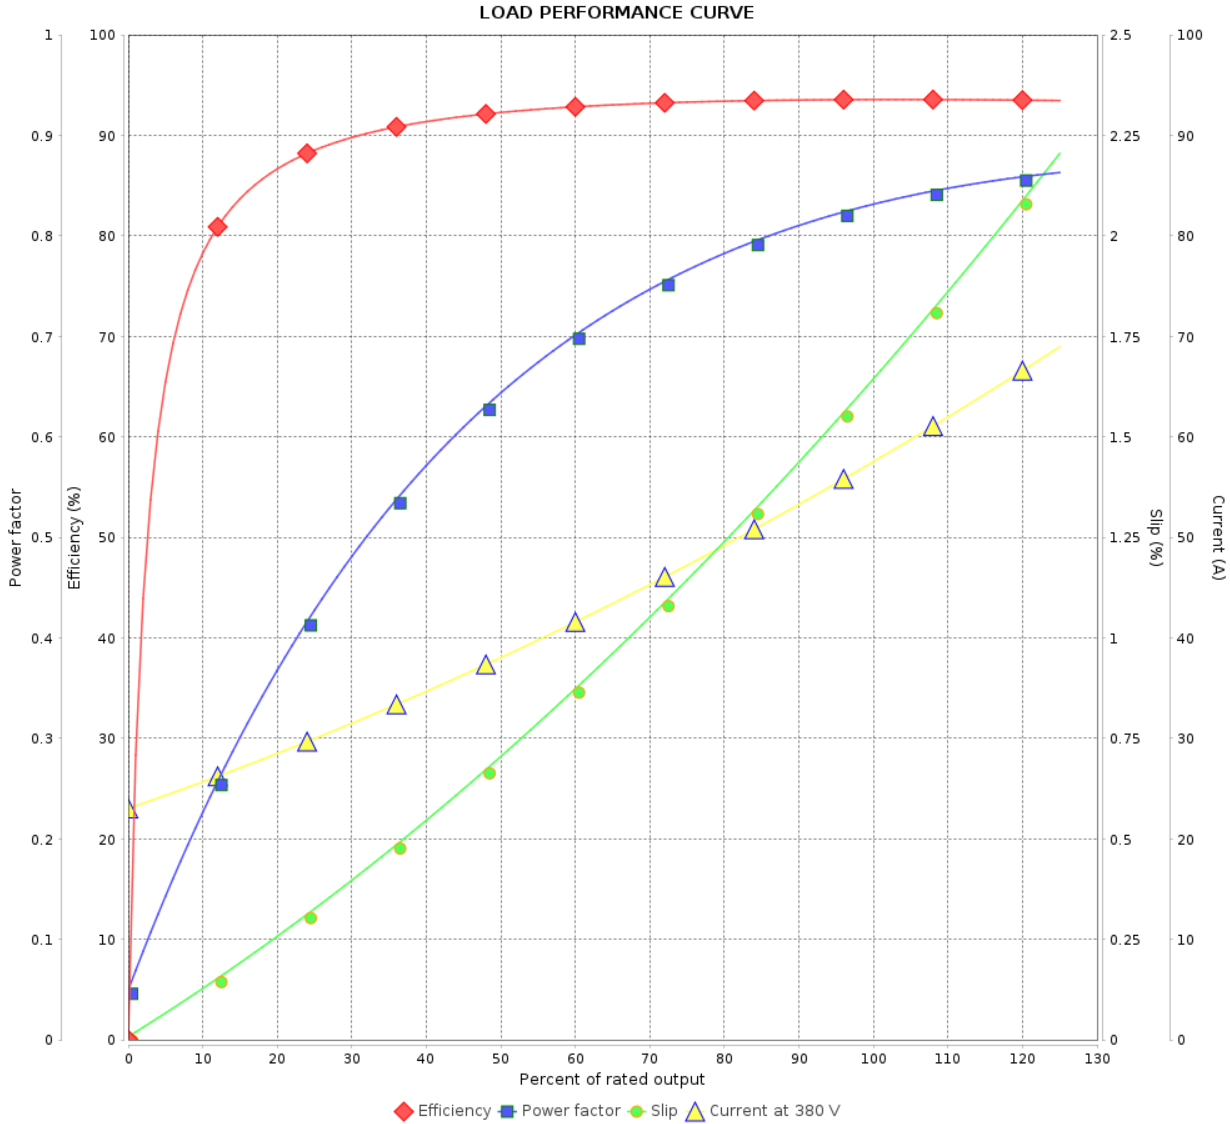

Performance : 380 V 50 Hz 4P IE3

Rated current : 58.7 A  
 LRC : 6.4  
 Rated torque : 19.7 kgfm  
 Locked rotor torque : 229 %  
 Breakdown torque : 260 %  
 Rated speed : 1475 rpm

Moment of inertia (J) : 0.3861 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 9	Revision
Checked by				
Date	15/01/2024			

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 P Base NEMA Premium Efficiency  
Three-Phase

Product code : 14562032

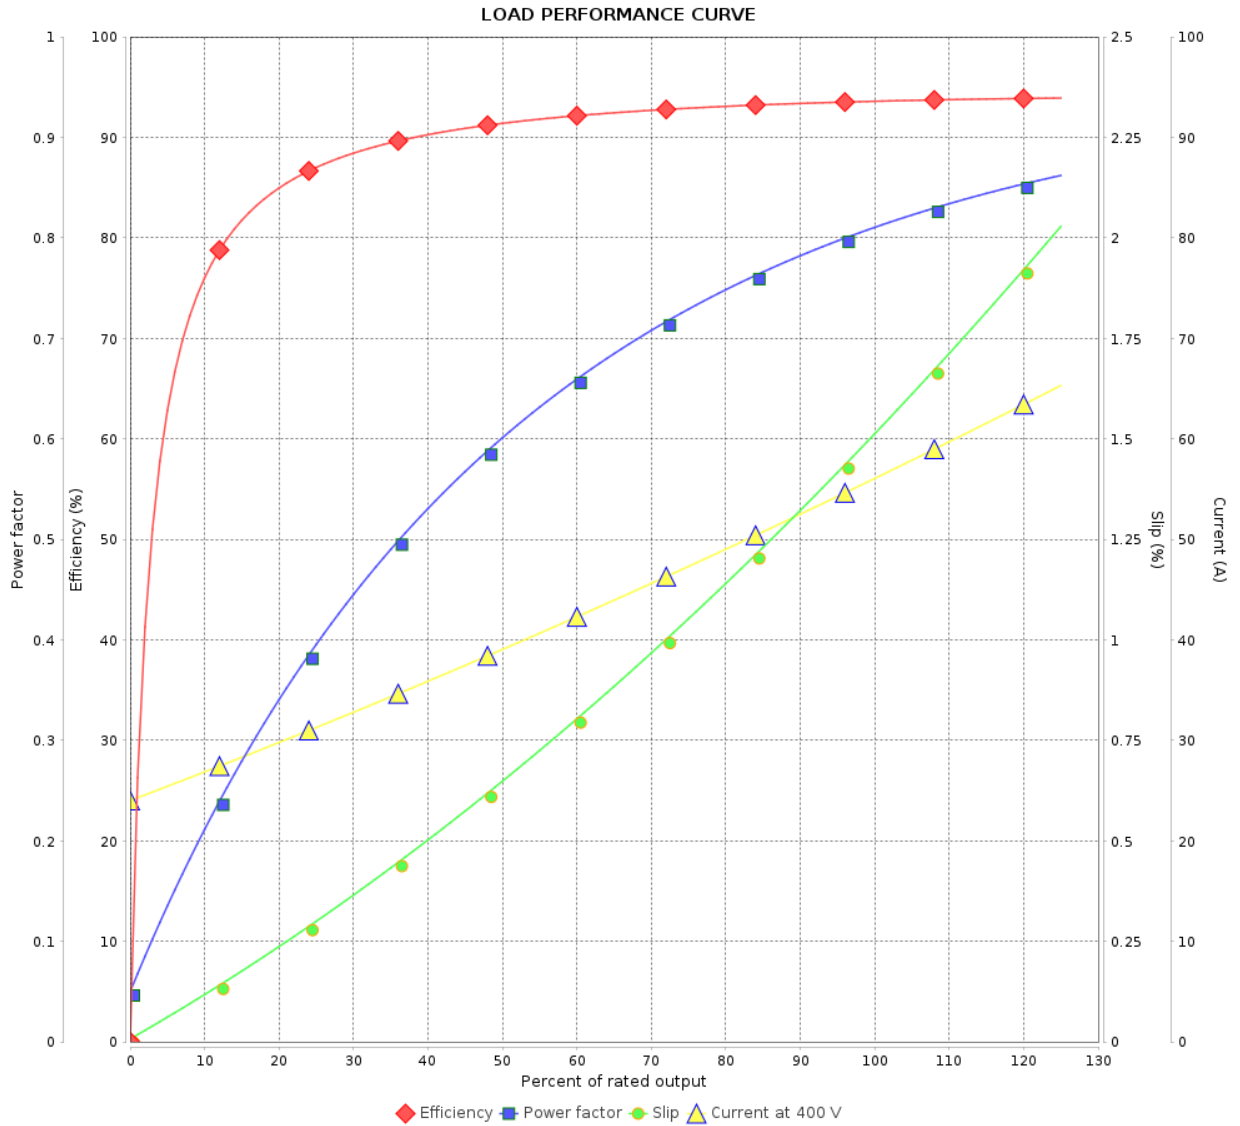

Performance : 400 V 50 Hz 4P IE3

Rated current : 57.1 A  
 LRC : 7.0  
 Rated torque : 19.7 kgfm  
 Locked rotor torque : 250 %  
 Breakdown torque : 300 %  
 Rated speed : 1477 rpm

Moment of inertia (J) : 0.3861 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				
			5 / 9	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium Efficiency  
Three-Phase

Product code : 14562032

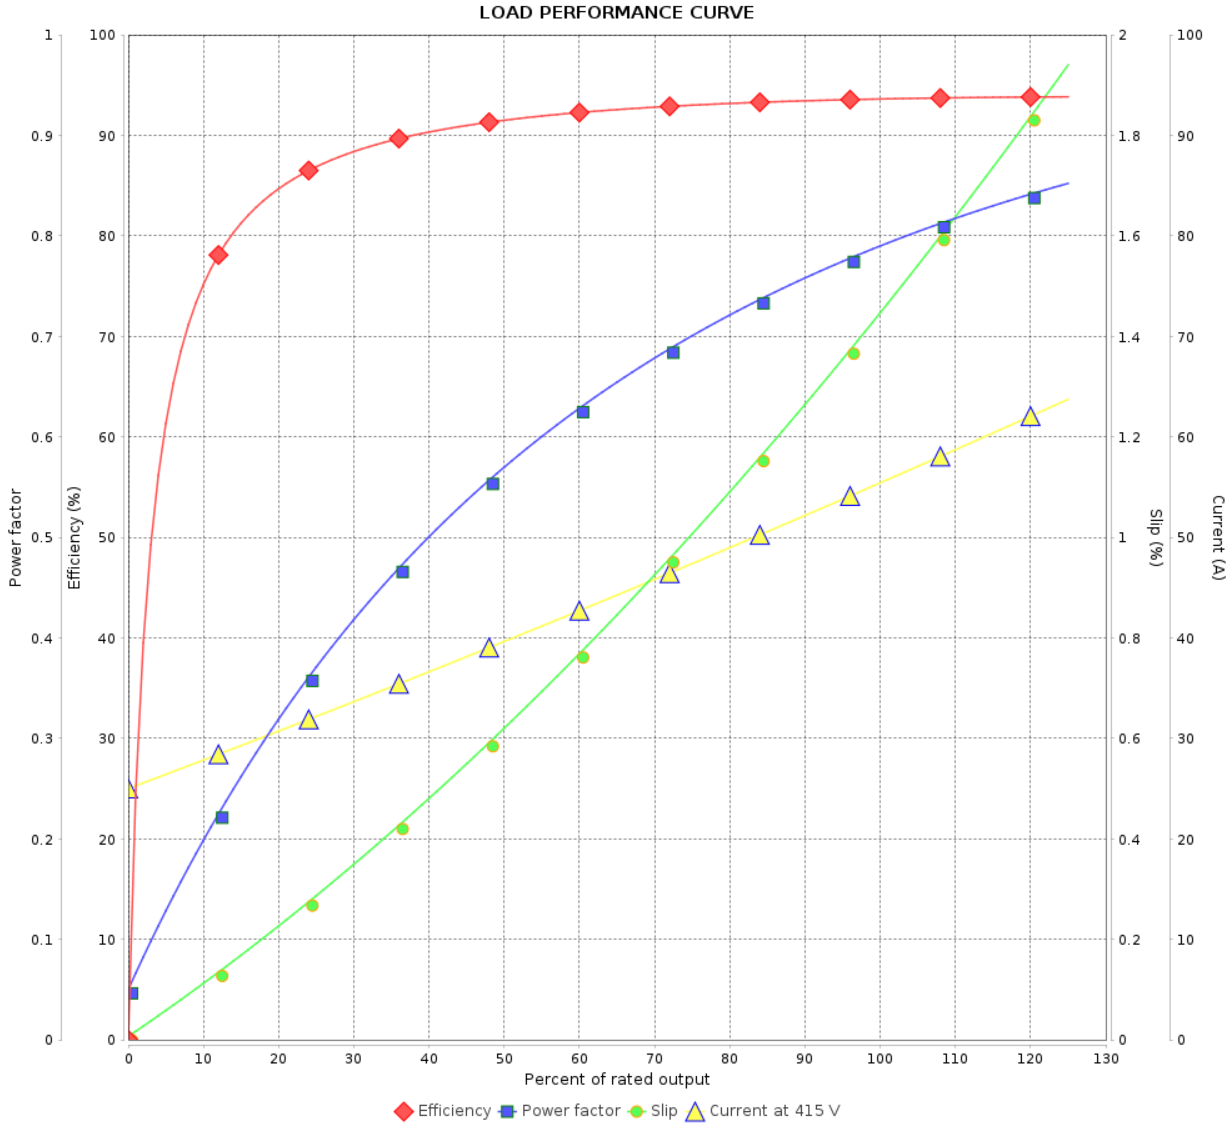

Performance : 415 V 50 Hz 4P IE3

Rated current : 56.4 A  
 LRC : 7.4  
 Rated torque : 19.6 kgfm  
 Locked rotor torque : 260 %  
 Breakdown torque : 330 %  
 Rated speed : 1478 rpm

Moment of inertia (J) : 0.3861 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 9	Revision
Checked by				
Date	15/01/2024			

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 P Base NEMA Premium Efficiency  
Three-Phase

Product code : 14562032

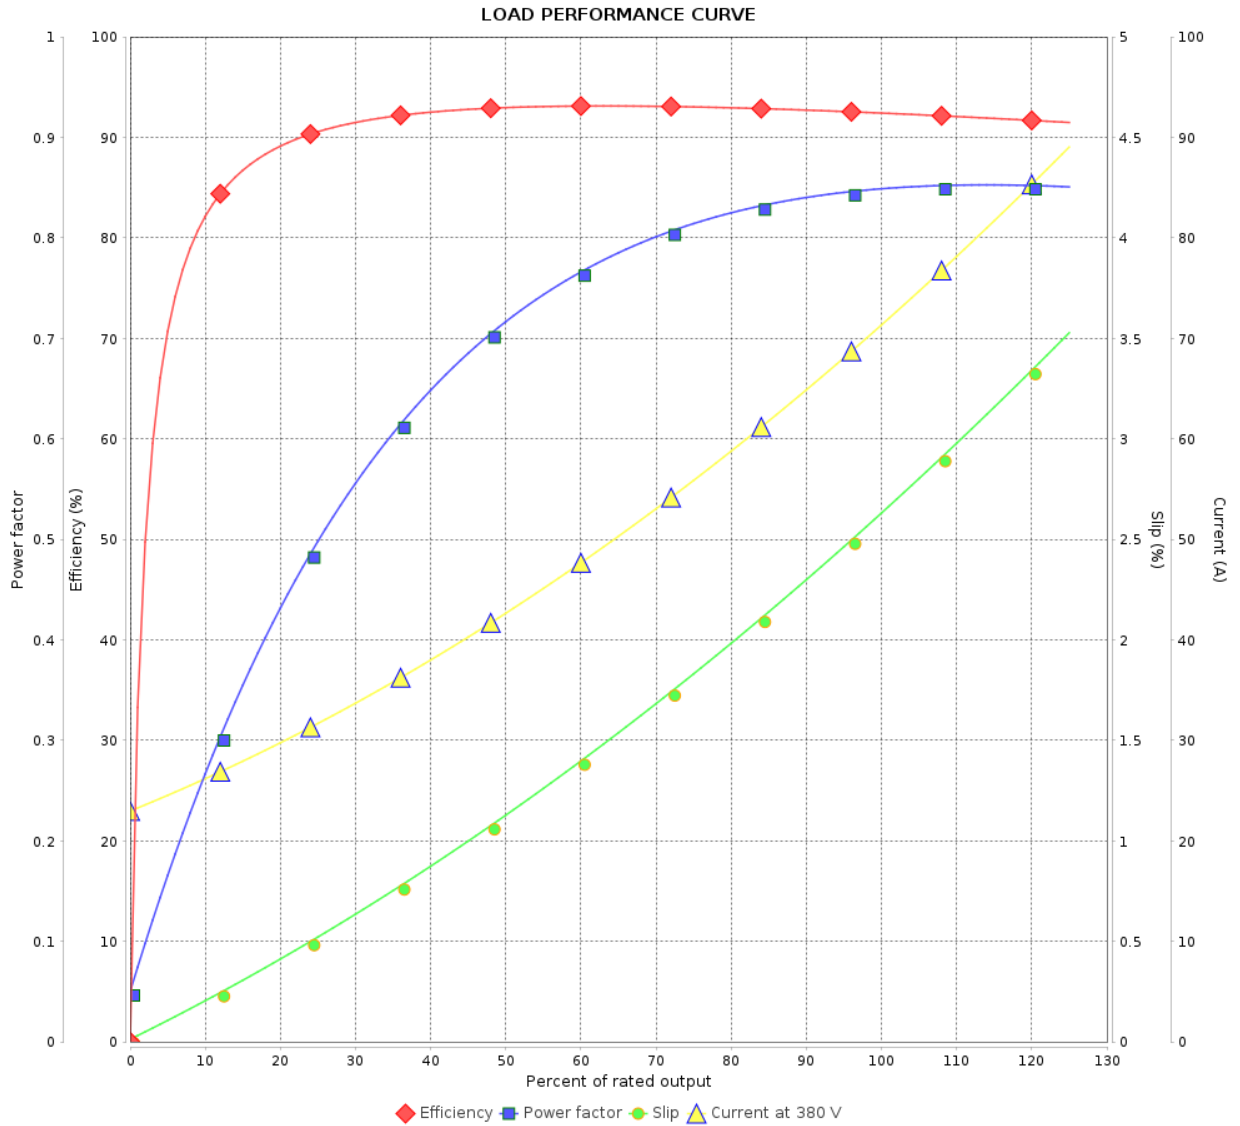

Performance : 380 V 50 Hz 4P IE1

Rated current : 71.6 A  
 LRC : 5.2  
 Rated torque : 24.9 kgfm  
 Locked rotor torque : 180 %  
 Breakdown torque : 200 %  
 Rated speed : 1460 rpm

Moment of inertia (J) : 0.3861 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 105 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date	
Performed by					
Checked by					
Date					15/01/2024
		Page	Revision		
		7 / 9			

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 P Base NEMA Premium Efficiency  
Three-Phase

Product code : 14562032

LOAD PERFORMANCE CURVE

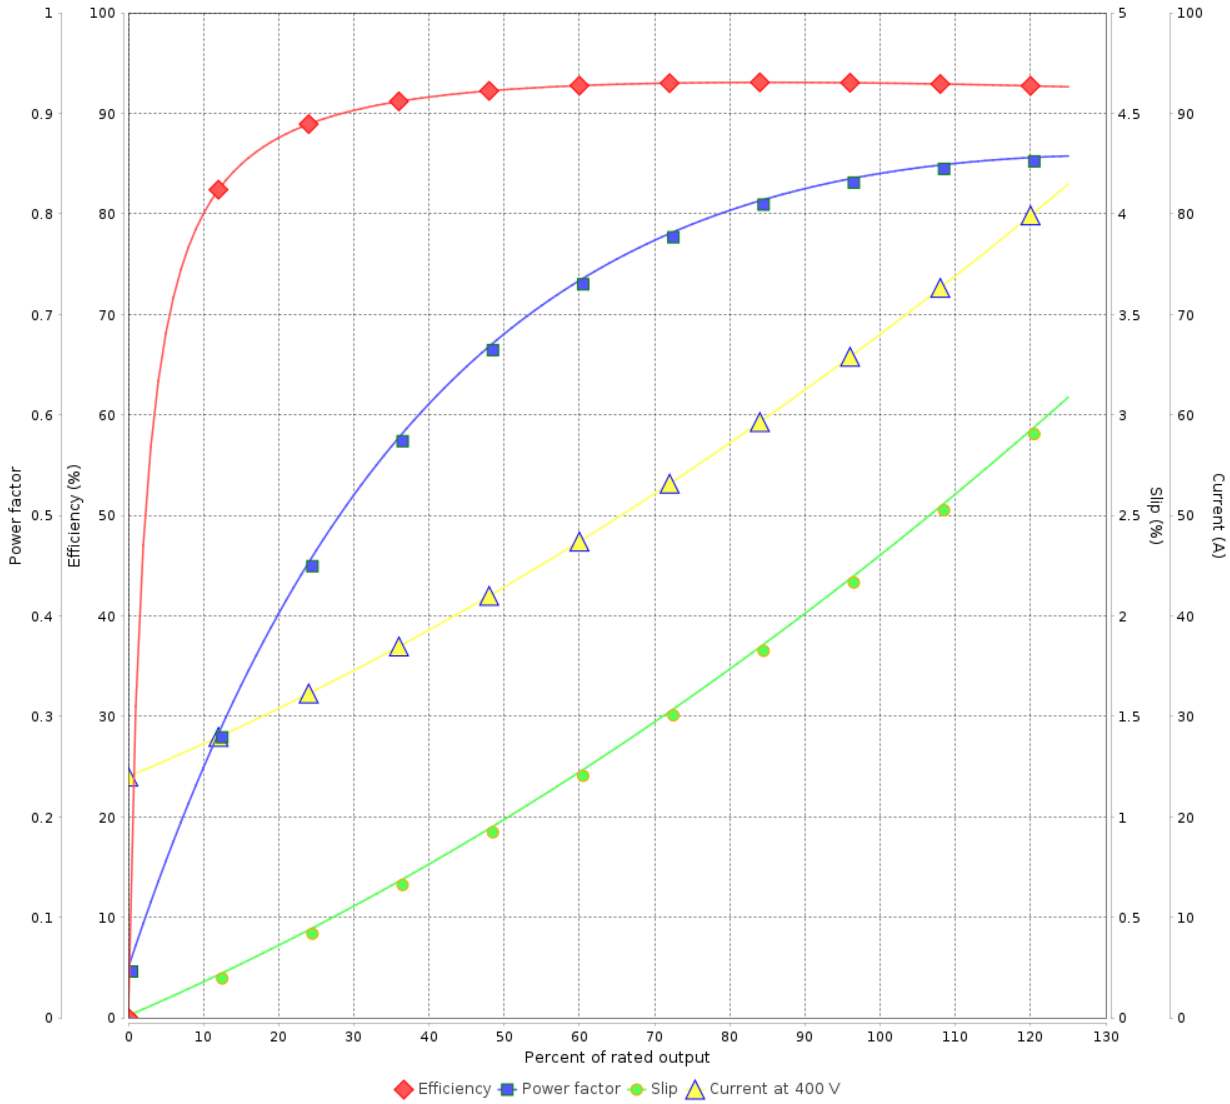

Performance : 400 V 50 Hz 4P IE2

Rated current : 68.4 A  
 LRC : 5.8  
 Rated torque : 24.8 kgfm  
 Locked rotor torque : 200 %  
 Breakdown torque : 240 %  
 Rated speed : 1465 rpm

Moment of inertia (J) : 0.3861 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 105 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 9	Revision
Checked by				
Date	15/01/2024			



# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 P Base NEMA Premium Efficiency  
Three-Phase

Product code : 14562032

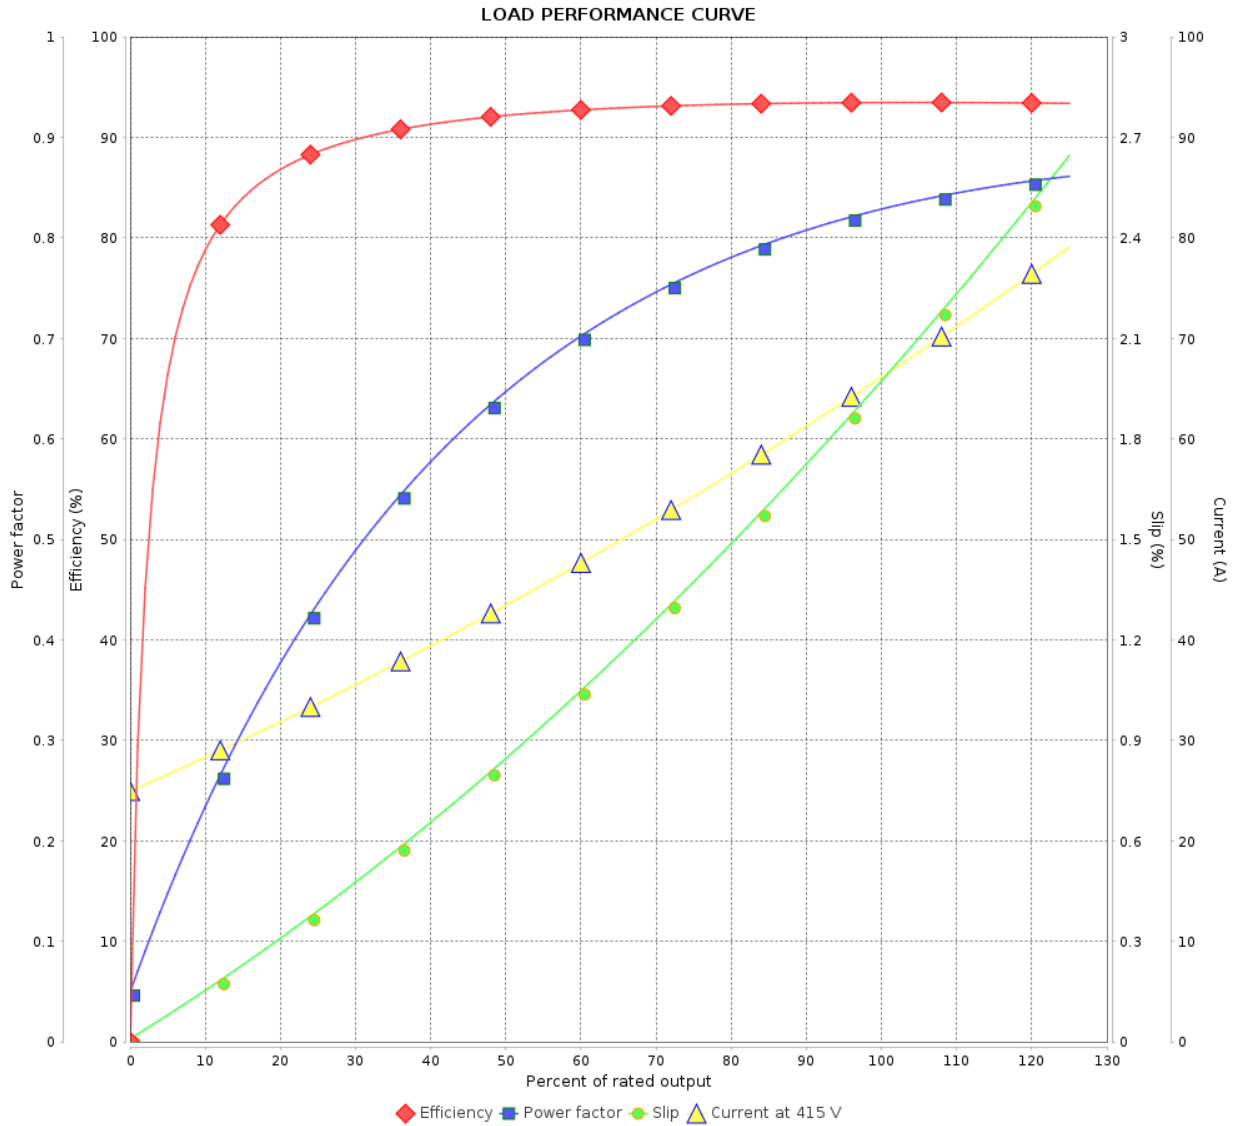

Performance : 415 V 50 Hz 4P IE2

Rated current : 66.3 A  
 LRC : 6.2  
 Rated torque : 24.7 kgfm  
 Locked rotor torque : 210 %  
 Breakdown torque : 260 %  
 Rated speed : 1470 rpm

Moment of inertia (J) : 0.3861 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 105 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				