

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line		: W22 Brake Motor NEMA Premium Efficiency Three-Phase		Product code :		14679747
Frame	:	324/6TC		Locked rotor time	:	36s (cold) 20s (hot)
Output	:	40 HP (30 kW)		Temperature rise	:	80 K
Poles	:	4		Duty cycle	:	Cont.(S1)
Frequency	:	60 Hz		Ambient temperature	:	-20°C to +40°C
Rated voltage	:	575 V		Altitude	:	1000 m.a.s.l.
Rated current	:	37.7 A		Protection degree	:	IP55
L. R. Amperes	:	230 A		Cooling method	:	IC411 - TEFC
LRC	:	6.1x(Code G)		Mounting	:	F-1
No load current	:	13.8 A		Rotation <sup>1</sup>	:	Both (CW and CCW)
Rated speed	:	1775 rpm		Noise level <sup>2</sup>	:	66.0 dB(A)
Slip	:	1.39 %		Starting method	:	Direct On Line
Rated torque	:	16.4 kgfm		Approx. weight <sup>3</sup>	:	308 kg
Locked rotor torque	:	229 %				
Breakdown torque	:	240 %				
Insulation class	:	F				
Service factor	:	1.25				
Moment of inertia (J)	:	0.3861 kgm <sup>2</sup>				
Design	:	B				
Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	93.6	94.1	94.1	Max. traction	: 340 kgf
Power Factor	0.00	0.72	0.80	0.85	Max. compression	: 648 kgf
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
6.2	5.4	4.9	2.8	2.0	1.3	0.9
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6312 C3		6212 C3		
Sealing	:	V'Ring		Lip Seal		
Lubrication interval	:	20000 h		20000 h		
Lubricant amount	:	21 g		13 g		
Lubricant type	:	Mobil Polyrex EM				
Notes						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	02/01/2025				1 / 3	

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

### Brake information

Voltage: 525-575 V  
Brake Torque: 40.8 kgfm

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	02/01/2025		2 / 3	


# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase      Product code : 14679747

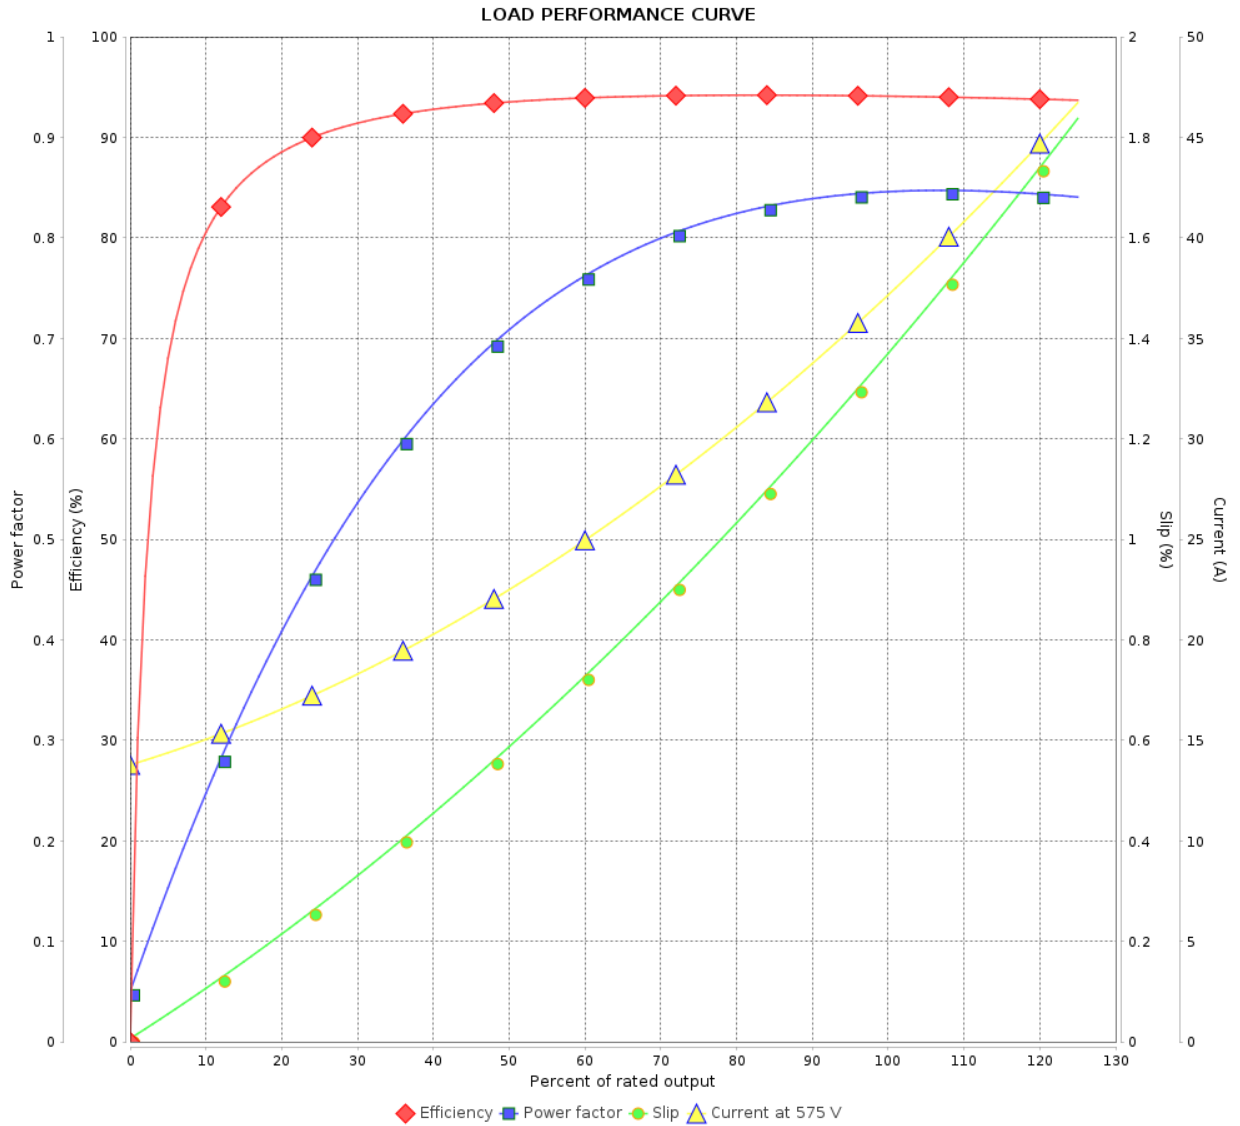

Performance : 575 V 60 Hz 4P

Rated current	: 37.7 A	Moment of inertia (J)	: 0.3861 kgm <sup>2</sup>
LRC	: 6.1	Duty cycle	: Cont.(S1)
Rated torque	: 16.4 kgfm	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	: 1.25
Breakdown torque	: 240 %	Temperature rise	: 80 K
Rated speed	: 1775 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 3	Revision
Checked by				
Date	02/01/2025			