

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP
NEMA Premium Efficiency Three-Phase
Product code : 14732255

Frame	: 324/6JP	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ²	: 254 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.2422 kgm ²
Design	: B		

Output [HP]	50	40	40	40	50	50	50
Poles	2	2	2	2	2	2	2
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	112/56.1	55.1	52.7	51.4	69.4	65.4	62.6
L. R. Amperes [A]	707/353	363	374	396	361	366	394
LRC [A]	6.3x(Code G)	6.6x(Code G)	7.1x(Code H)	7.7x(Code J)	5.2x(Code E)	5.6x(Code F)	6.3x(Code G)
No load current [A]	28.0/14.0	13.0	14.1	15.5	13.0	14.1	15.5
Rated speed [RPM]	3560	2960	2965	2967	2935	2947	2954
Slip [%]	1.11	1.33	1.17	1.10	2.17	1.77	1.53
Rated torque [kgfm]	10.2	9.81	9.79	9.77	12.3	12.3	12.3
Locked rotor torque [%]	240	240	260	280	190	210	229
Breakdown torque [%]	240	229	250	280	190	200	220
Service factor	1.25	1.00	1.00	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	36s (cold) 20s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	30s (cold) 17s (hot)	21s (cold) 12s (hot)	23s (cold) 13s (hot)	21s (cold) 12s (hot)
Noise level ²	76.0 dB(A)	72.0 dB(A)	72.0 dB(A)	72.0 dB(A)	72.0 dB(A)	72.0 dB(A)	72.0 dB(A)
Efficiency (%)	25%	0.000					
	50%	93.0	92.8	92.2	92.2	93.0	93.0
	75%	93.0	92.9	92.8	93.1	92.4	93.0
	100%	93.0	93.0	93.3	93.3	91.0	92.4
Power Factor	25%	0.00					
	50%	0.81	0.80	0.77	0.76	0.85	0.83
	75%	0.87	0.87	0.86	0.84	0.88	0.87
	100%	0.89	0.89	0.88	0.87	0.89	0.89

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	6.8	6.8	6.5	6.5	9.0	8.2	7.5
	P2 (0,5;1,0)	4.4	4.4	4.2	4.2	5.7	5.3	4.8
	P3 (0,25;1,0)	3.5	3.5	3.3	3.3	4.6	4.2	3.8
	P4 (0,9;0,5)	4.1	4.1	3.9	3.9	5.4	5.0	4.5
	P5 (0,5;0,5)	2.0	2.0	1.9	1.9	2.7	2.5	2.2
	P6 (0,5;0,25)	1.5	1.5	1.4	1.4	2.0	1.8	1.6
	P7 (0,25;0,25)	0.7	0.7	0.7	0.7	1.0	0.9	0.8

		<u>Drive end</u>	<u>Non drive end</u>	Foundation loads	
Bearing type	:	6312 C3	6212 C3	Max. traction	: 213 kgf
Sealing	:	V'Ring	V'Ring	Max. compression	: 467 kgf
Lubrication interval	:	12000 h	15000 h		
Lubricant amount	:	21 g	13 g		
Lubricant type	:	Mobil Polyrex EM			

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	24/10/2024			1 / 9	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	24/10/2024		2 / 9	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP
NEMA Premium Efficiency Three-Phase

Product code : 14732255

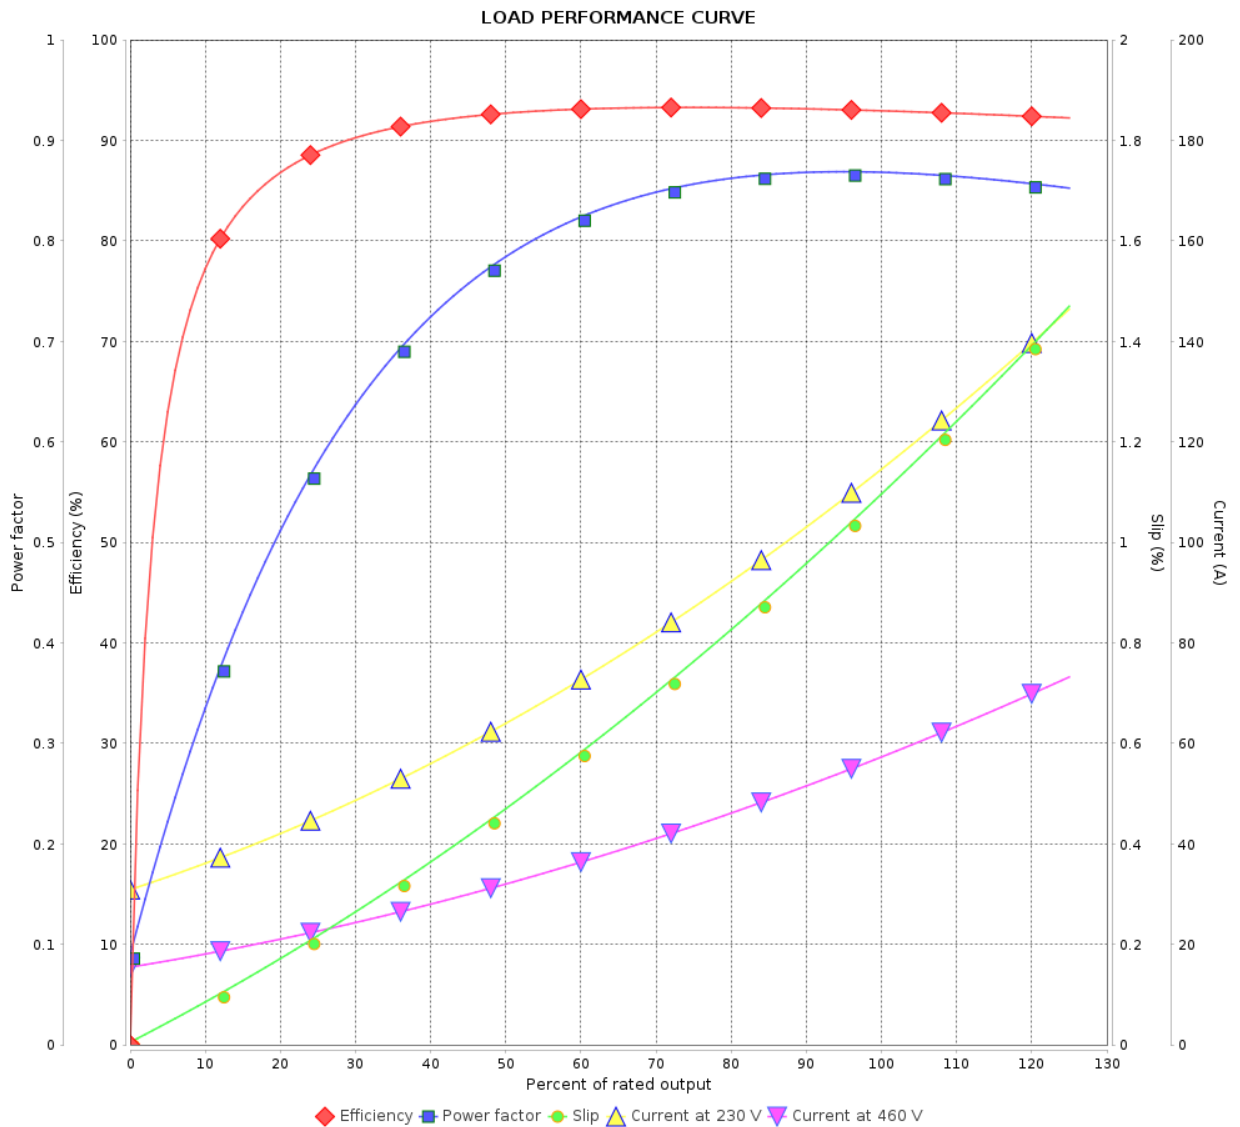

Performance : 230/460 V 60 Hz 2P

Rated current : 112/56.1 A
LRC : 6.3
Rated torque : 10.2 kgfm
Locked rotor torque : 240 %
Breakdown torque : 240 %
Rated speed : 3560 rpm

Moment of inertia (J) : 0.2422 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP
 NEMA Premium Efficiency Three-Phase
 Product code : 14732255

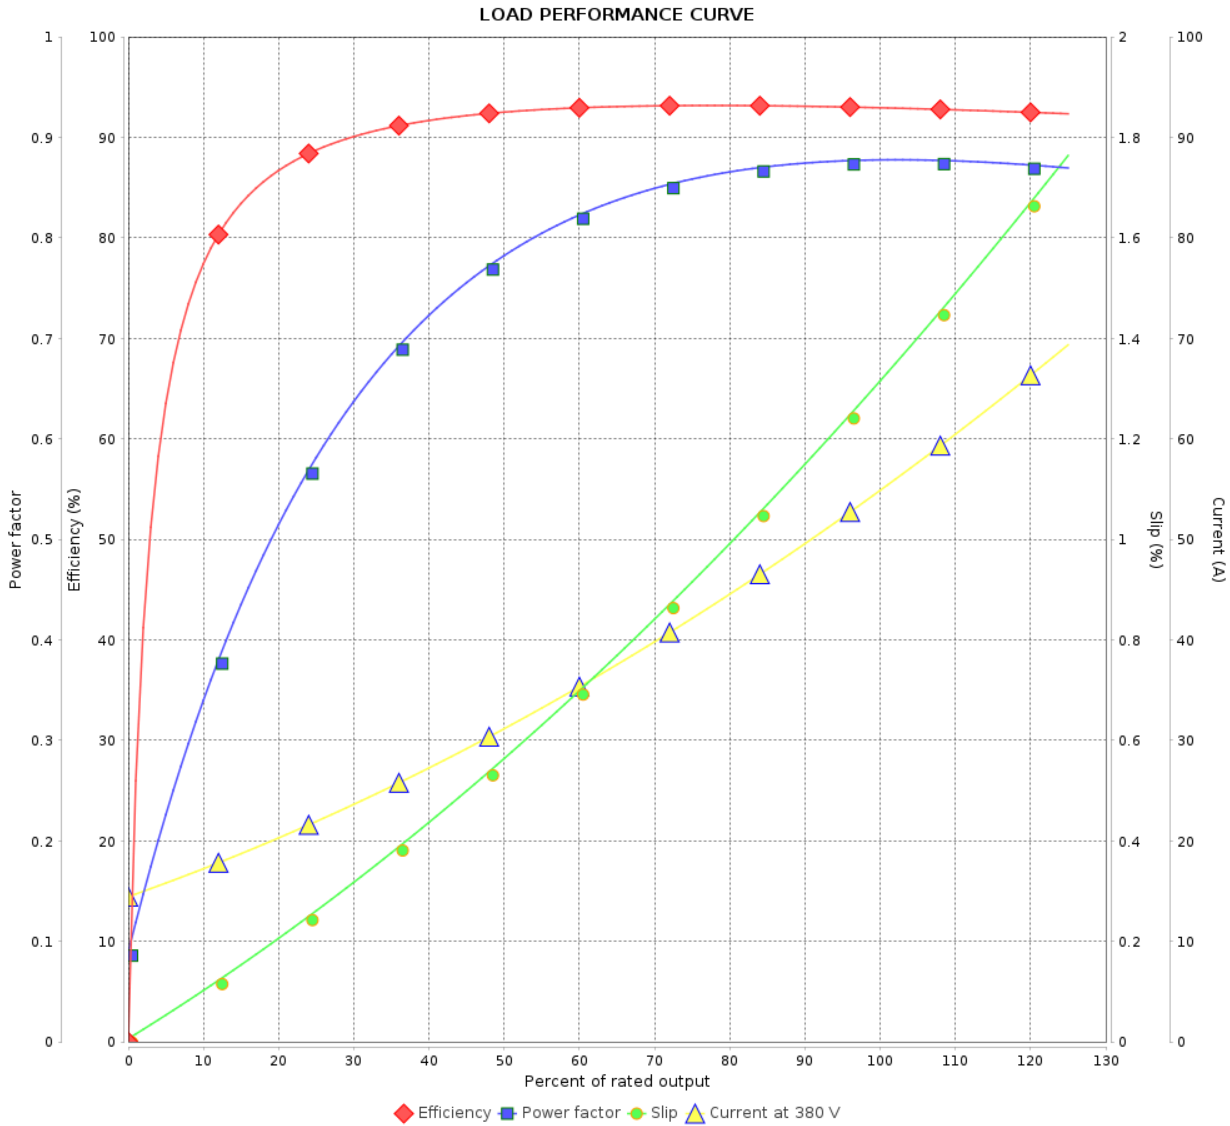

Performance : 380 V 50 Hz 2P IE2

Rated current	: 55.1 A	Moment of inertia (J)	: 0.2422 kgm ²
LRC	: 6.6	Duty cycle	: Cont.(S1)
Rated torque	: 9.81 kgfm	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.00
Breakdown torque	: 229 %	Temperature rise	: 80 K
Rated speed	: 2960 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			4 / 9	
Date	24/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP
NEMA Premium Efficiency Three-Phase

Product code : 14732255

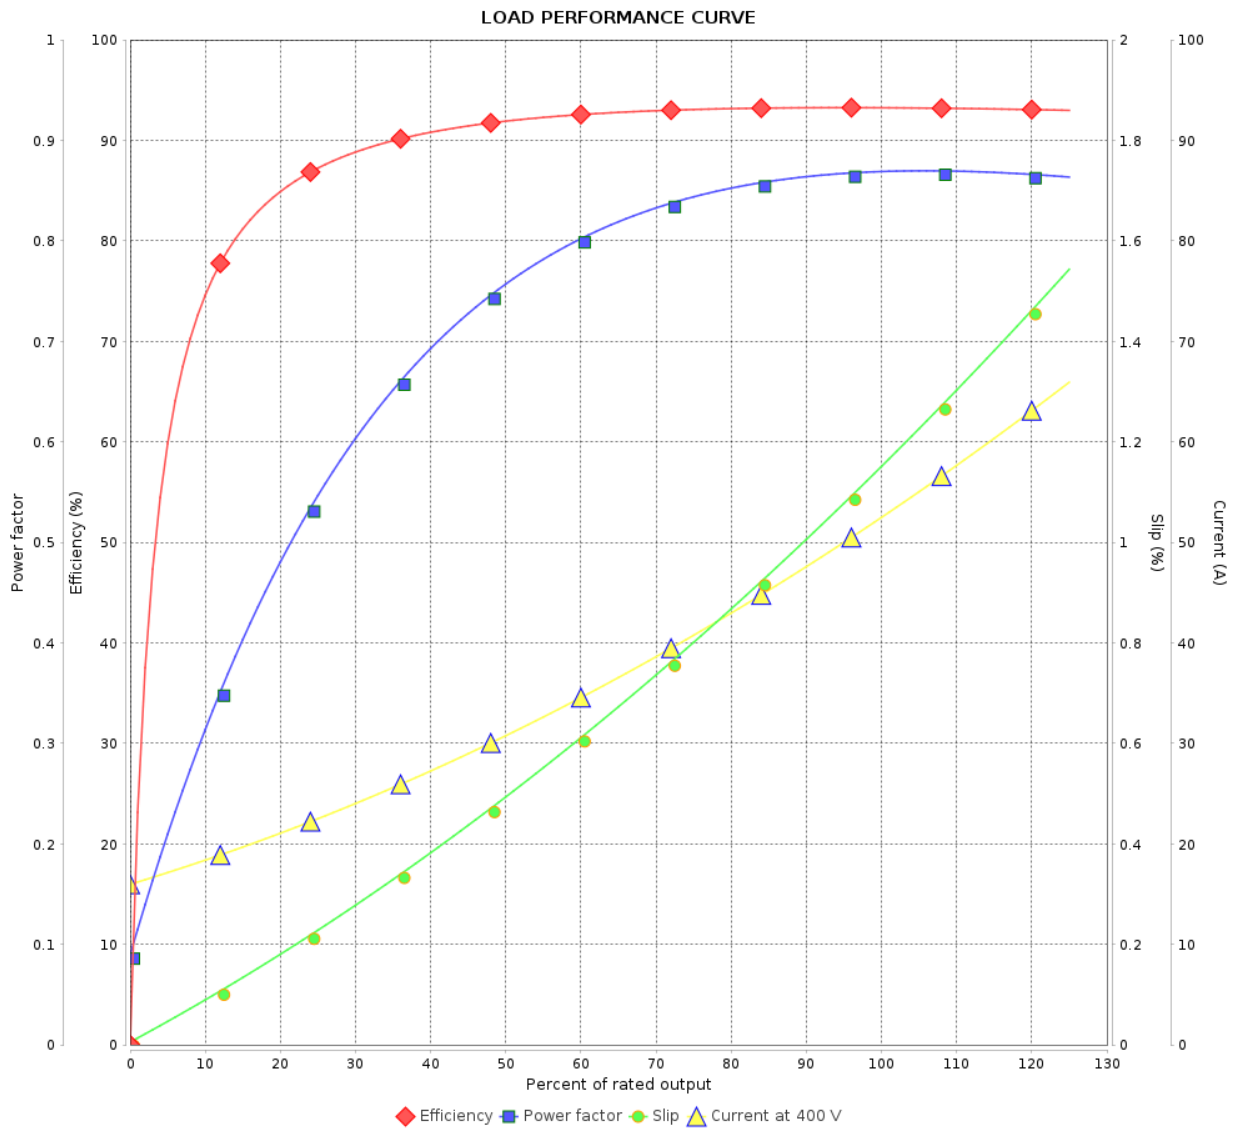

Performance : 400 V 50 Hz 2P IE3

Rated current : 52.7 A
 LRC : 7.1
 Rated torque : 9.79 kgfm
 Locked rotor torque : 260 %
 Breakdown torque : 250 %
 Rated speed : 2965 rpm

Moment of inertia (J) : 0.2422 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP NEMA Premium Efficiency Three-Phase
 Product code : 14732255

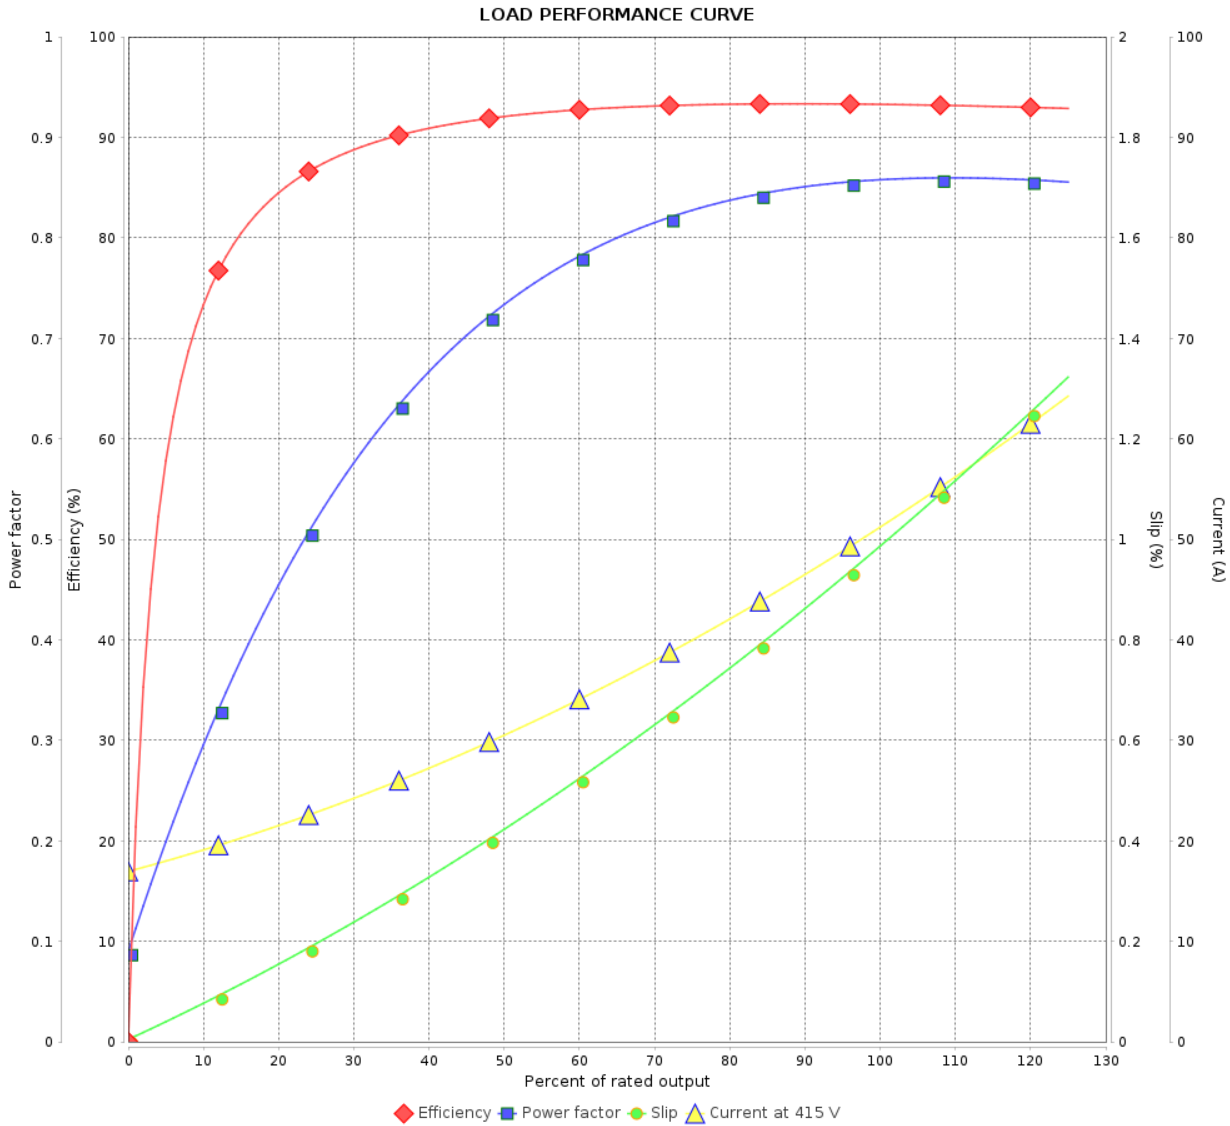

Performance : 415 V 50 Hz 2P IE3

Rated current	: 51.4 A	Moment of inertia (J)	: 0.2422 kgm ²
LRC	: 7.7	Duty cycle	: Cont.(S1)
Rated torque	: 9.77 kgfm	Insulation class	: F
Locked rotor torque	: 280 %	Service factor	: 1.00
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 2967 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			6 / 9	
Date	24/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP
NEMA Premium Efficiency Three-Phase

Product code : 14732255

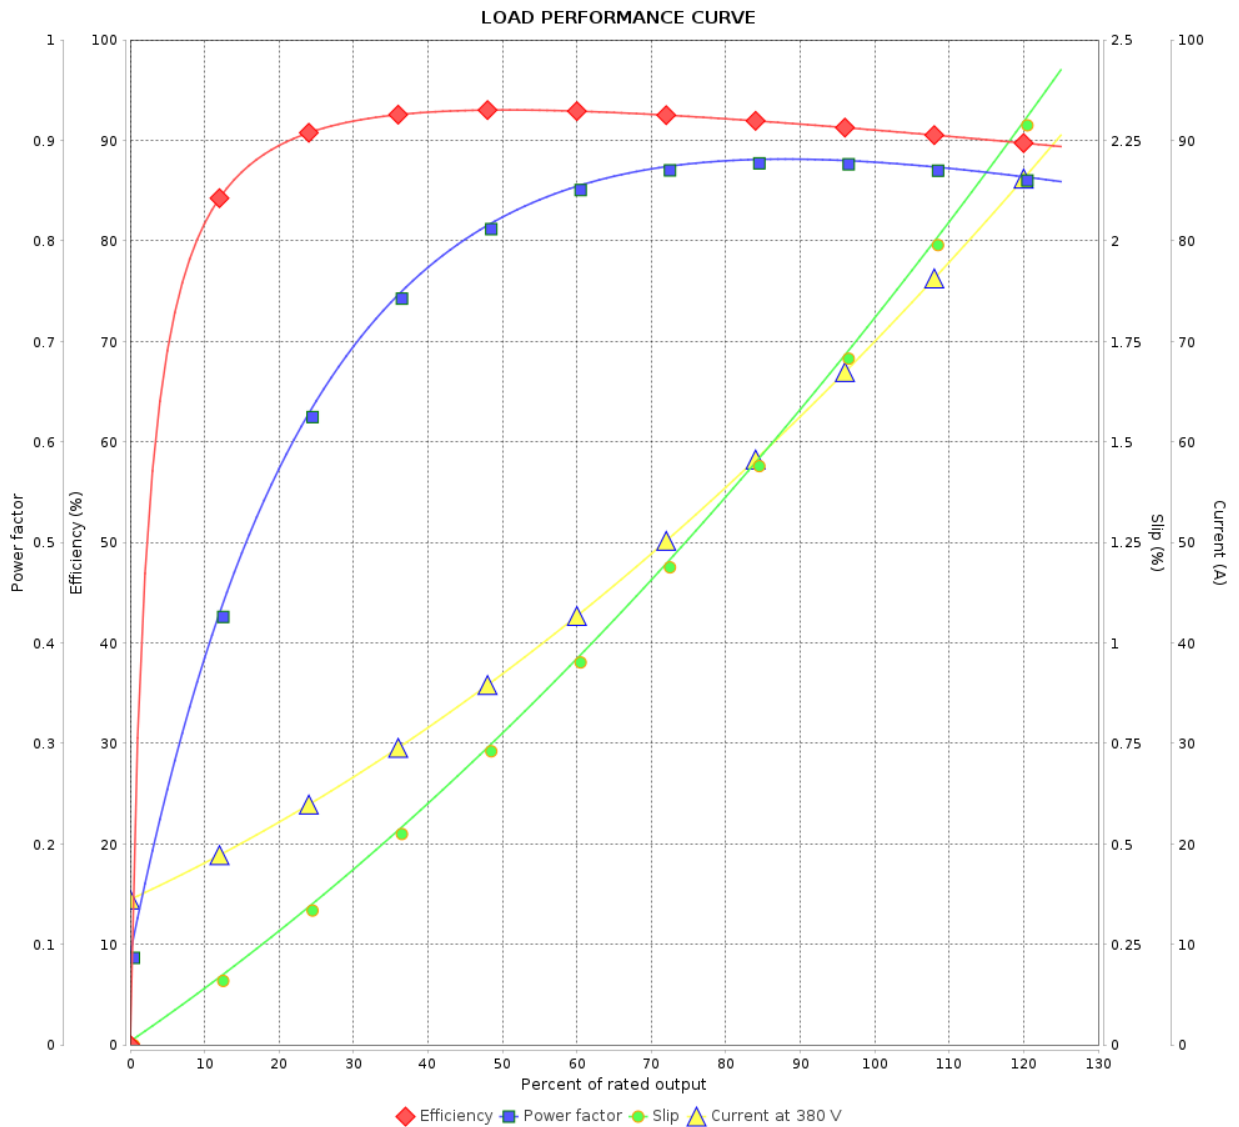

Performance : 380 V 50 Hz 2P

Rated current : 69.4 A
 LRC : 5.2
 Rated torque : 12.3 kgfm
 Locked rotor torque : 190 %
 Breakdown torque : 190 %
 Rated speed : 2935 rpm

Moment of inertia (J) : 0.2422 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		Page	Revision	
		7 / 9		


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP
 NEMA Premium Efficiency Three-Phase
 Product code : 14732255

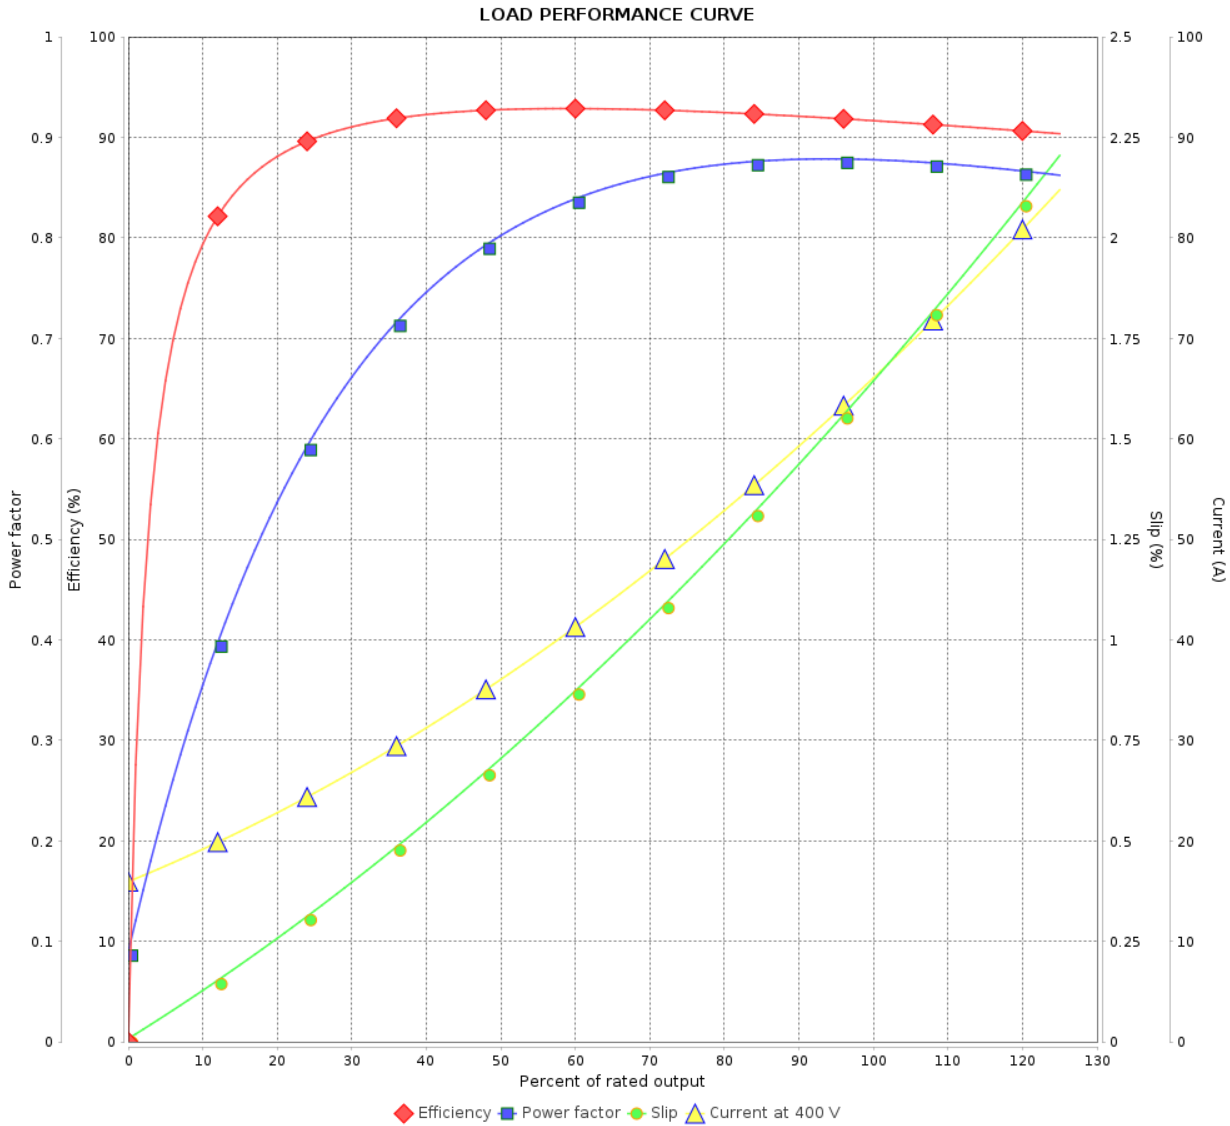

Performance : 400 V 50 Hz 2P IE1

Rated current	: 65.4 A	Moment of inertia (J)	: 0.2422 kgm ²
LRC	: 5.6	Duty cycle	: Cont.(S1)
Rated torque	: 12.3 kgfm	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.00
Breakdown torque	: 200 %	Temperature rise	: 105 K
Rated speed	: 2947 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		8 / 9		
Date	24/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JP
NEMA Premium Efficiency Three-Phase

Product code : 14732255

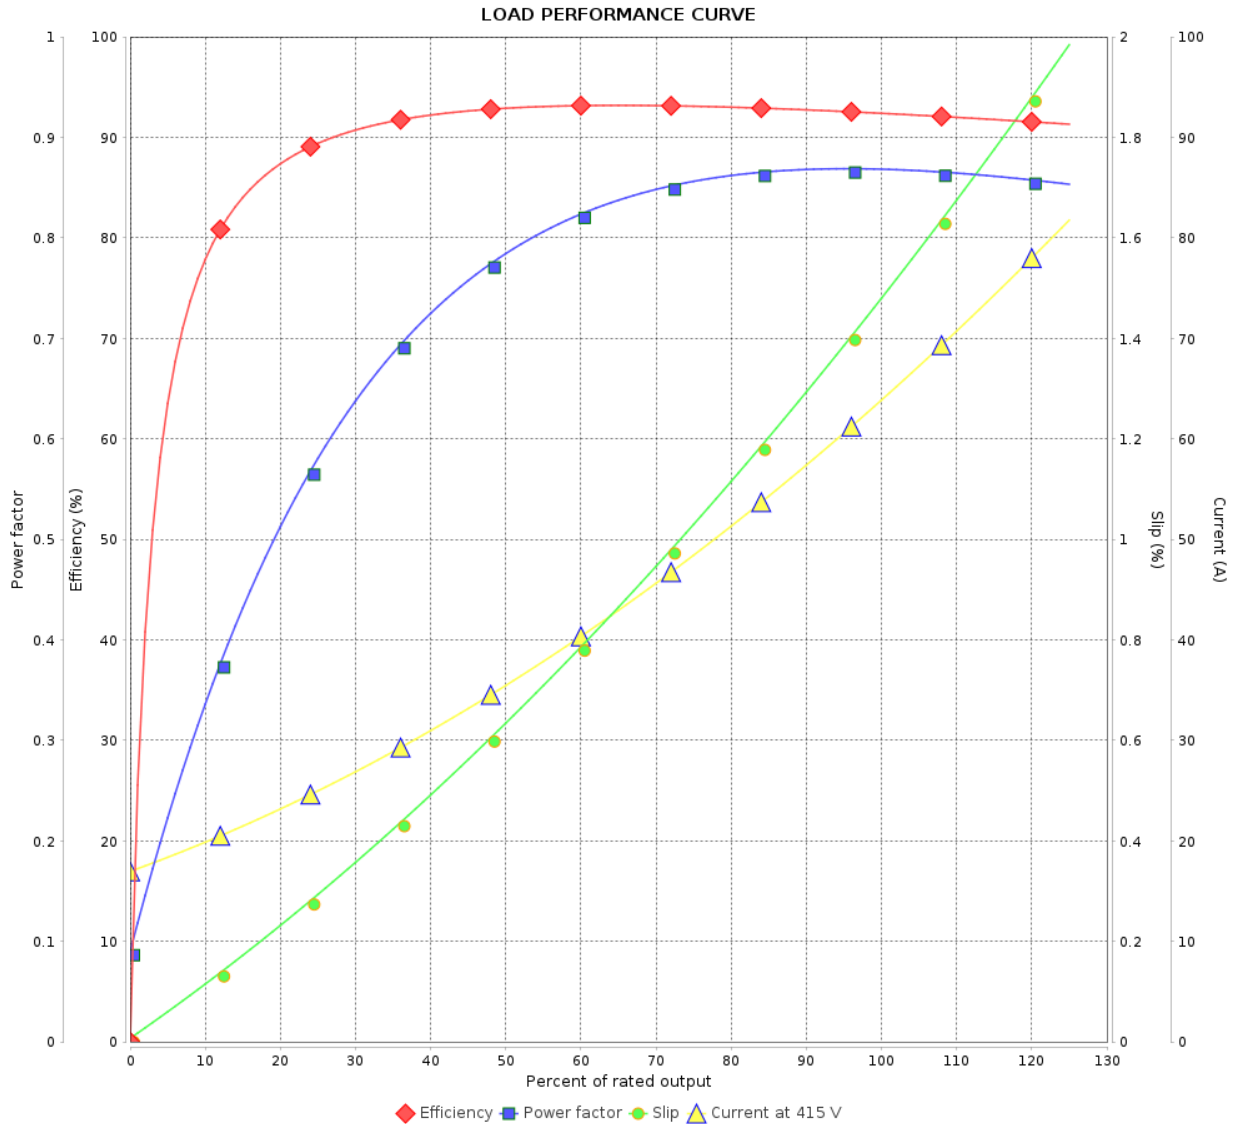

Performance : 415 V 50 Hz 2P IE1

Rated current : 62.6 A
 LRC : 6.3
 Rated torque : 12.3 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 220 %
 Rated speed : 2954 rpm

Moment of inertia (J) : 0.2422 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		Page	Revision	
		9 / 9		