

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line		: W22 Brake Motor NEMA Premium Efficiency Three-Phase		Product code :		14742134
Frame	:	143/5TC		Locked rotor time	:	25s (cold) 14s (hot)
Output	:	1.5 HP (1.1 kW)		Temperature rise	:	80 K
Poles	:	4		Duty cycle	:	Cont.(S1)
Frequency	:	60 Hz		Ambient temperature	:	-20°C to +40°C
Rated voltage	:	575 V		Altitude	:	1000 m.a.s.l.
Rated current	:	1.68 A		Protection degree	:	IP55
L. R. Amperes	:	14.1 A		Cooling method	:	IC411 - TEFC
LRC	:	8.4x(Code L)		Mounting	:	F-1
No load current	:	0.960 A		Rotation ¹	:	Both (CW and CCW)
Rated speed	:	1755 rpm		Noise level ²	:	51.0 dB(A)
Slip	:	2.50 %		Starting method	:	Direct On Line
Rated torque	:	0.620 kgfm		Approx. weight ³	:	31.5 kg
Locked rotor torque	:	290 %				
Breakdown torque	:	350 %				
Insulation class	:	F				
Service factor	:	1.25				
Moment of inertia (J)	:	0.0060 kgm ²				
Design	:	B				
Output	50%	75%	100%	Foundation loads		
Efficiency (%)	82.5	85.5	86.5	Max. traction	:	46 kgf
Power Factor	0.54	0.67	0.76	Max. compression	:	77 kgf
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
14.7	12.1	12.0	8.7	6.1	4.9	3.6
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6205 ZZ		6204 ZZ		
Sealing	:	V'Ring		Lip Seal		
Lubrication interval	:	-		-		
Lubricant amount	:	-		-		
Lubricant type	:	Mobil Polyrex EM				
Notes						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	30/12/2024				1 / 3	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Brake information

Voltage: 525-575 V
Brake Torque: 1.63 kgfm

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	30/12/2024		2 / 3	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 14742134

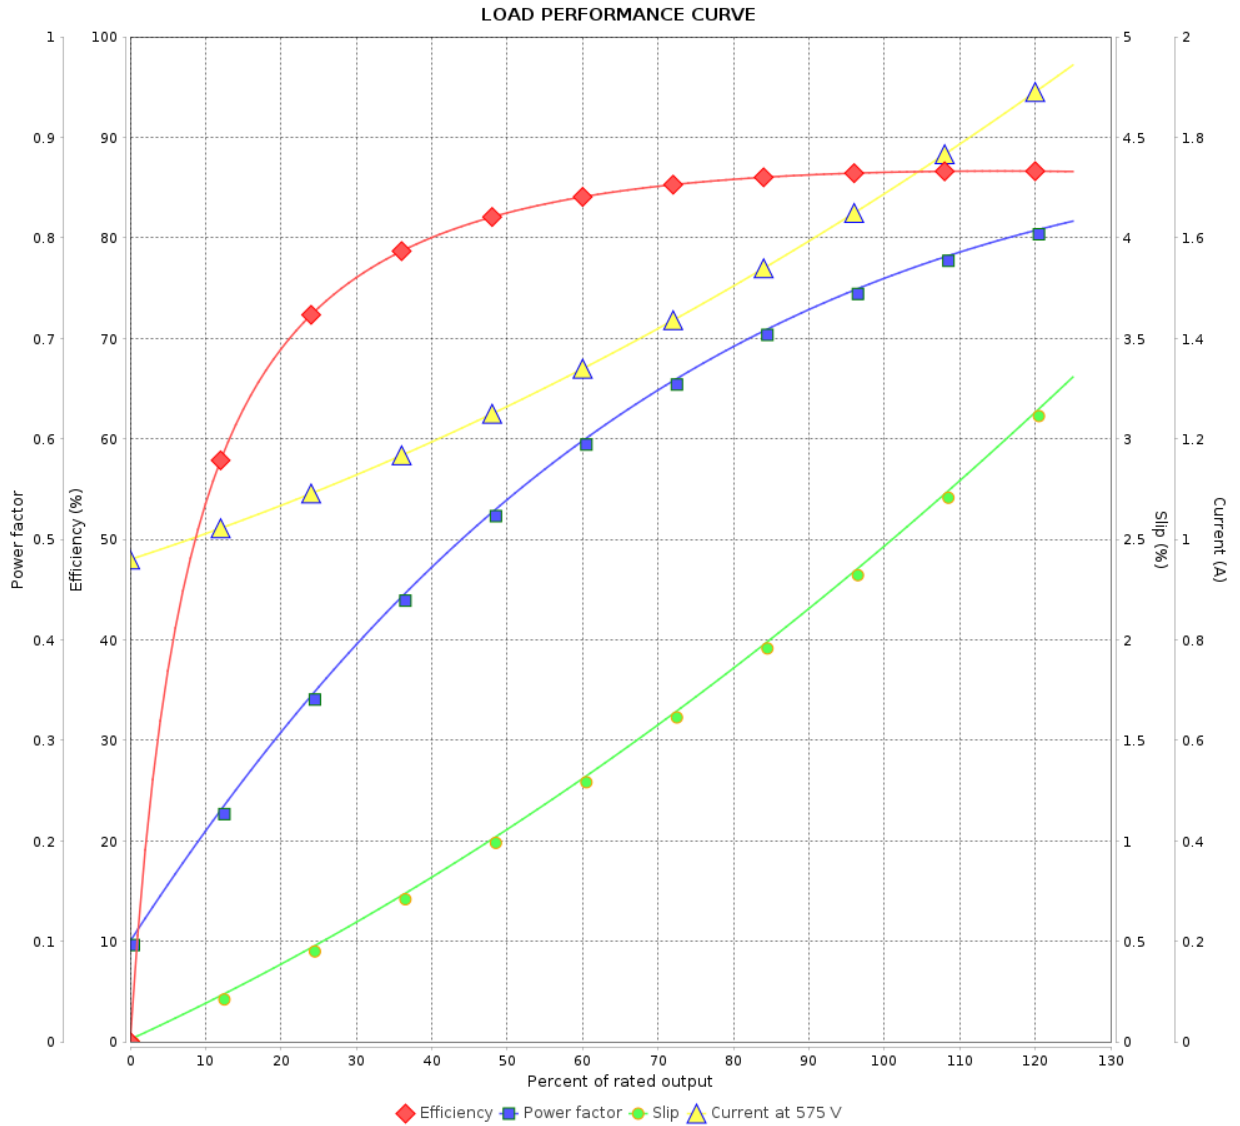

Performance : 575 V 60 Hz 4P

Rated current : 1.68 A
 LRC : 8.4
 Rated torque : 0.620 kgfm
 Locked rotor torque : 290 %
 Breakdown torque : 350 %
 Rated speed : 1755 rpm

Moment of inertia (J) : 0.0060 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 3	Revision
Checked by				
Date	30/12/2024			