

THE INFORMATION DISCLOSED HEREIN INCLUDES PROPRIETARY RIGHTS OF BLUFFTON MOTOR WORKS. NEITHER THIS DRAWING NOR THE INFORMATION DISCLOSED THEREIN SHALL BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR USED OR DISCLOSED TO OTHERS FOR MANUFACTURING PURPOSES OR FOR ANY OTHER PURPOSES, EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY BLUFFTON MOTOR WORKS.

1311007482

UNLESS OTHERWISE SPECIFIED DIMENSIONS WITHOUT TOLERANCES ARE REFERENCE ONLY


NOTES

1. MOTOR LISTED FOR HAZARDOUS LOCATION - CLASS I, GROUP C,D AND CLASS II, GROUP E,F,G.
2. CONDUIT BOX IS SUPPLIED AS UNASSEMBLED ITEM WITH MOTOR
3. 50HZ NAMEPLATE DATA
HP .33
V 190/380
RPM 1425
FLA 1.5/.75
SF 1.0

LEADS

24"+2-0
FROM CONDUIT HUB
WITH .44 STRIPPING

EXTERNAL CONNECTIONS

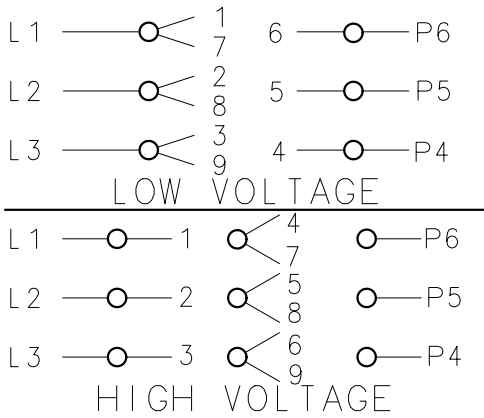

GR/YEL —


MOTOR DATA

TYPE POLYPHASE		ENCLOSURE TEFC-XPL		VIEWING LEAD END	MOTOR ROTATION REV
HP 1 / 2		BEARINGS BALL			ASSEMBLY ROTATION REV
PH 3	HZ 60 / 50	PAINT GRAY		ASSEMBLY VOLTAGE HIGH	
RPM 1725 / 1425	SF 1 . 0	MOUNTING POSITION HORIZONTAL		THERMALLY PROTECTED AUTOMATIC	
VOLTS 208-230 / 460		END CAP CANOPY		WINDING AND TEST SPEC 337887	
F . L . AMPS 1 . 7 / . 85	COLD ROLLED STEEL		ENVIRONMENTAL CONDITION NORMAL		CUSTOMER NAME WEG
S . F . AMPS .			SHAFT MATERIAL		CUSTOMER PART NO. . 5018XS3E56C
FRAME 56C			TEMP CODE T3B	DRAWN GWB 5-9-13	
TIME RATE CONT			MAX . AMB . 50 ° C	APPROVED .	
KVA CODE L			INS . CLASS F	RELEASED .	

BLUFFTONMOTORWORKS
Bluffton, Indiana 46714

MODEL NUMBER

1311007482

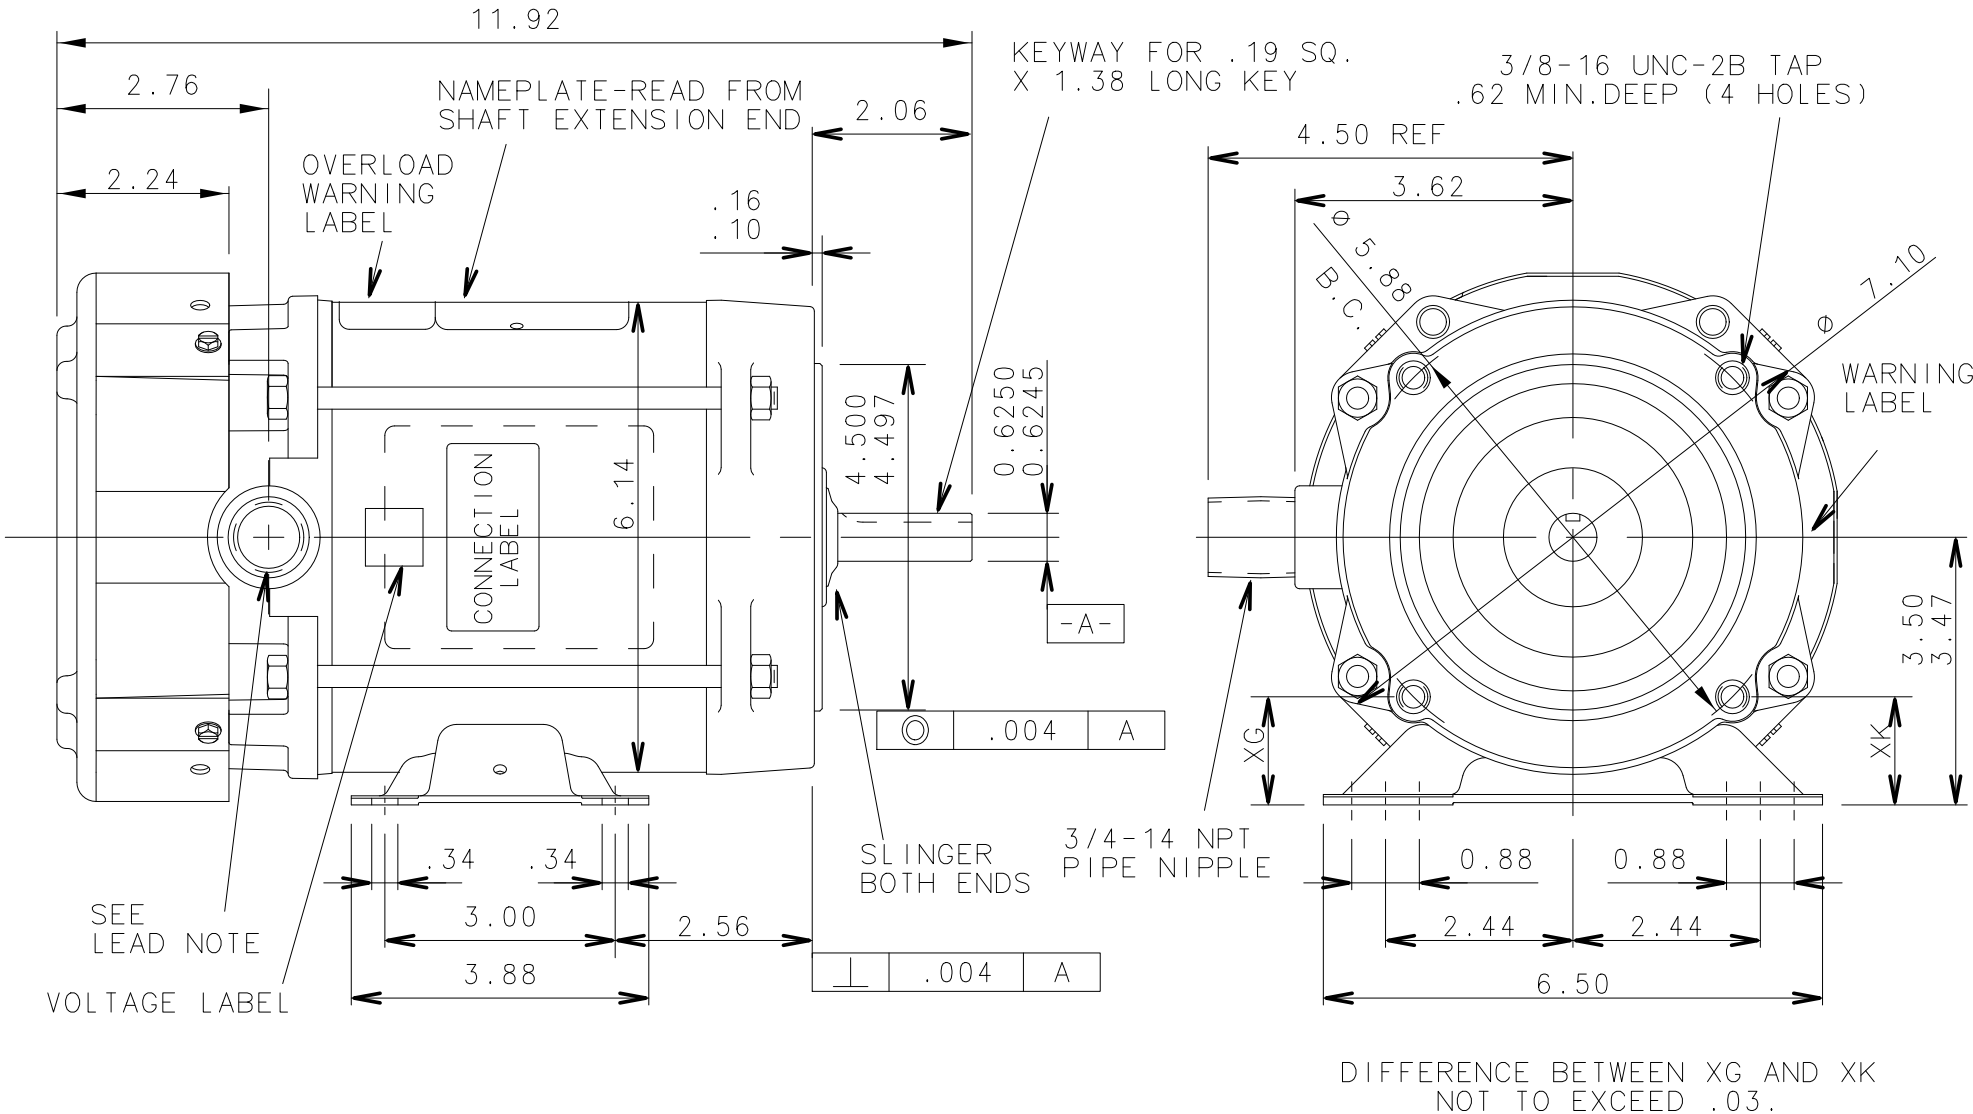

DIST: 3-21(2)-26-31-35