
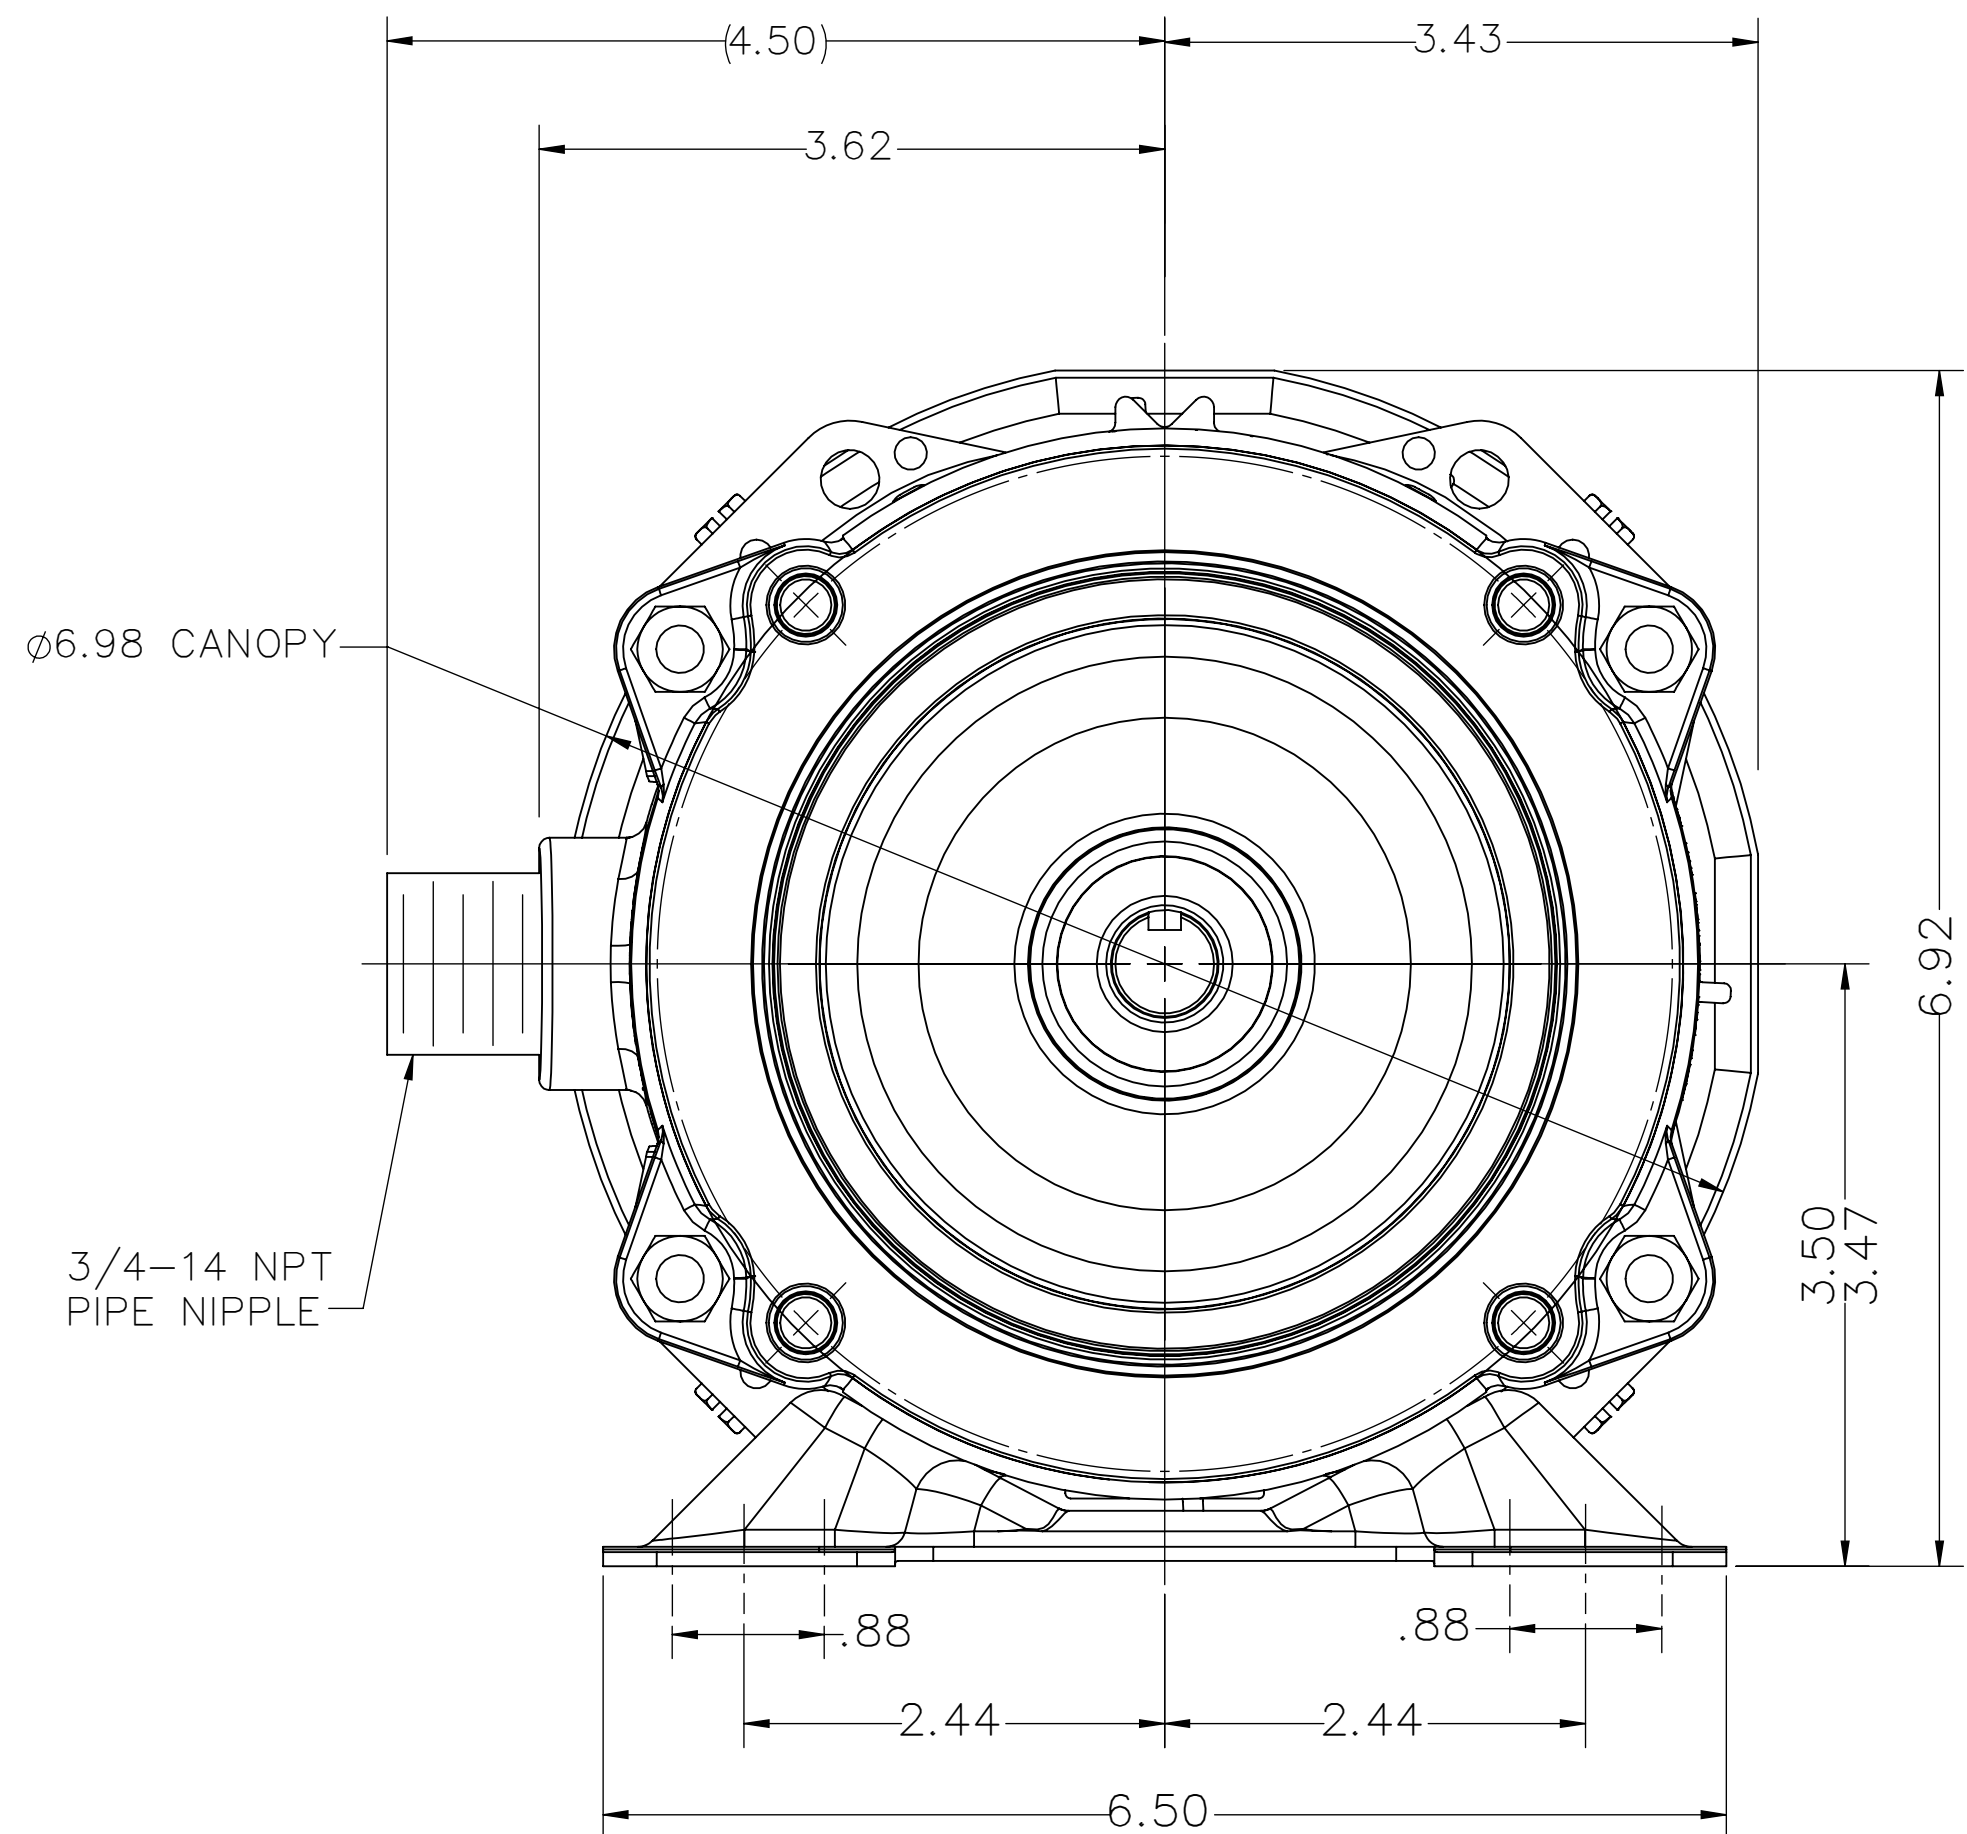


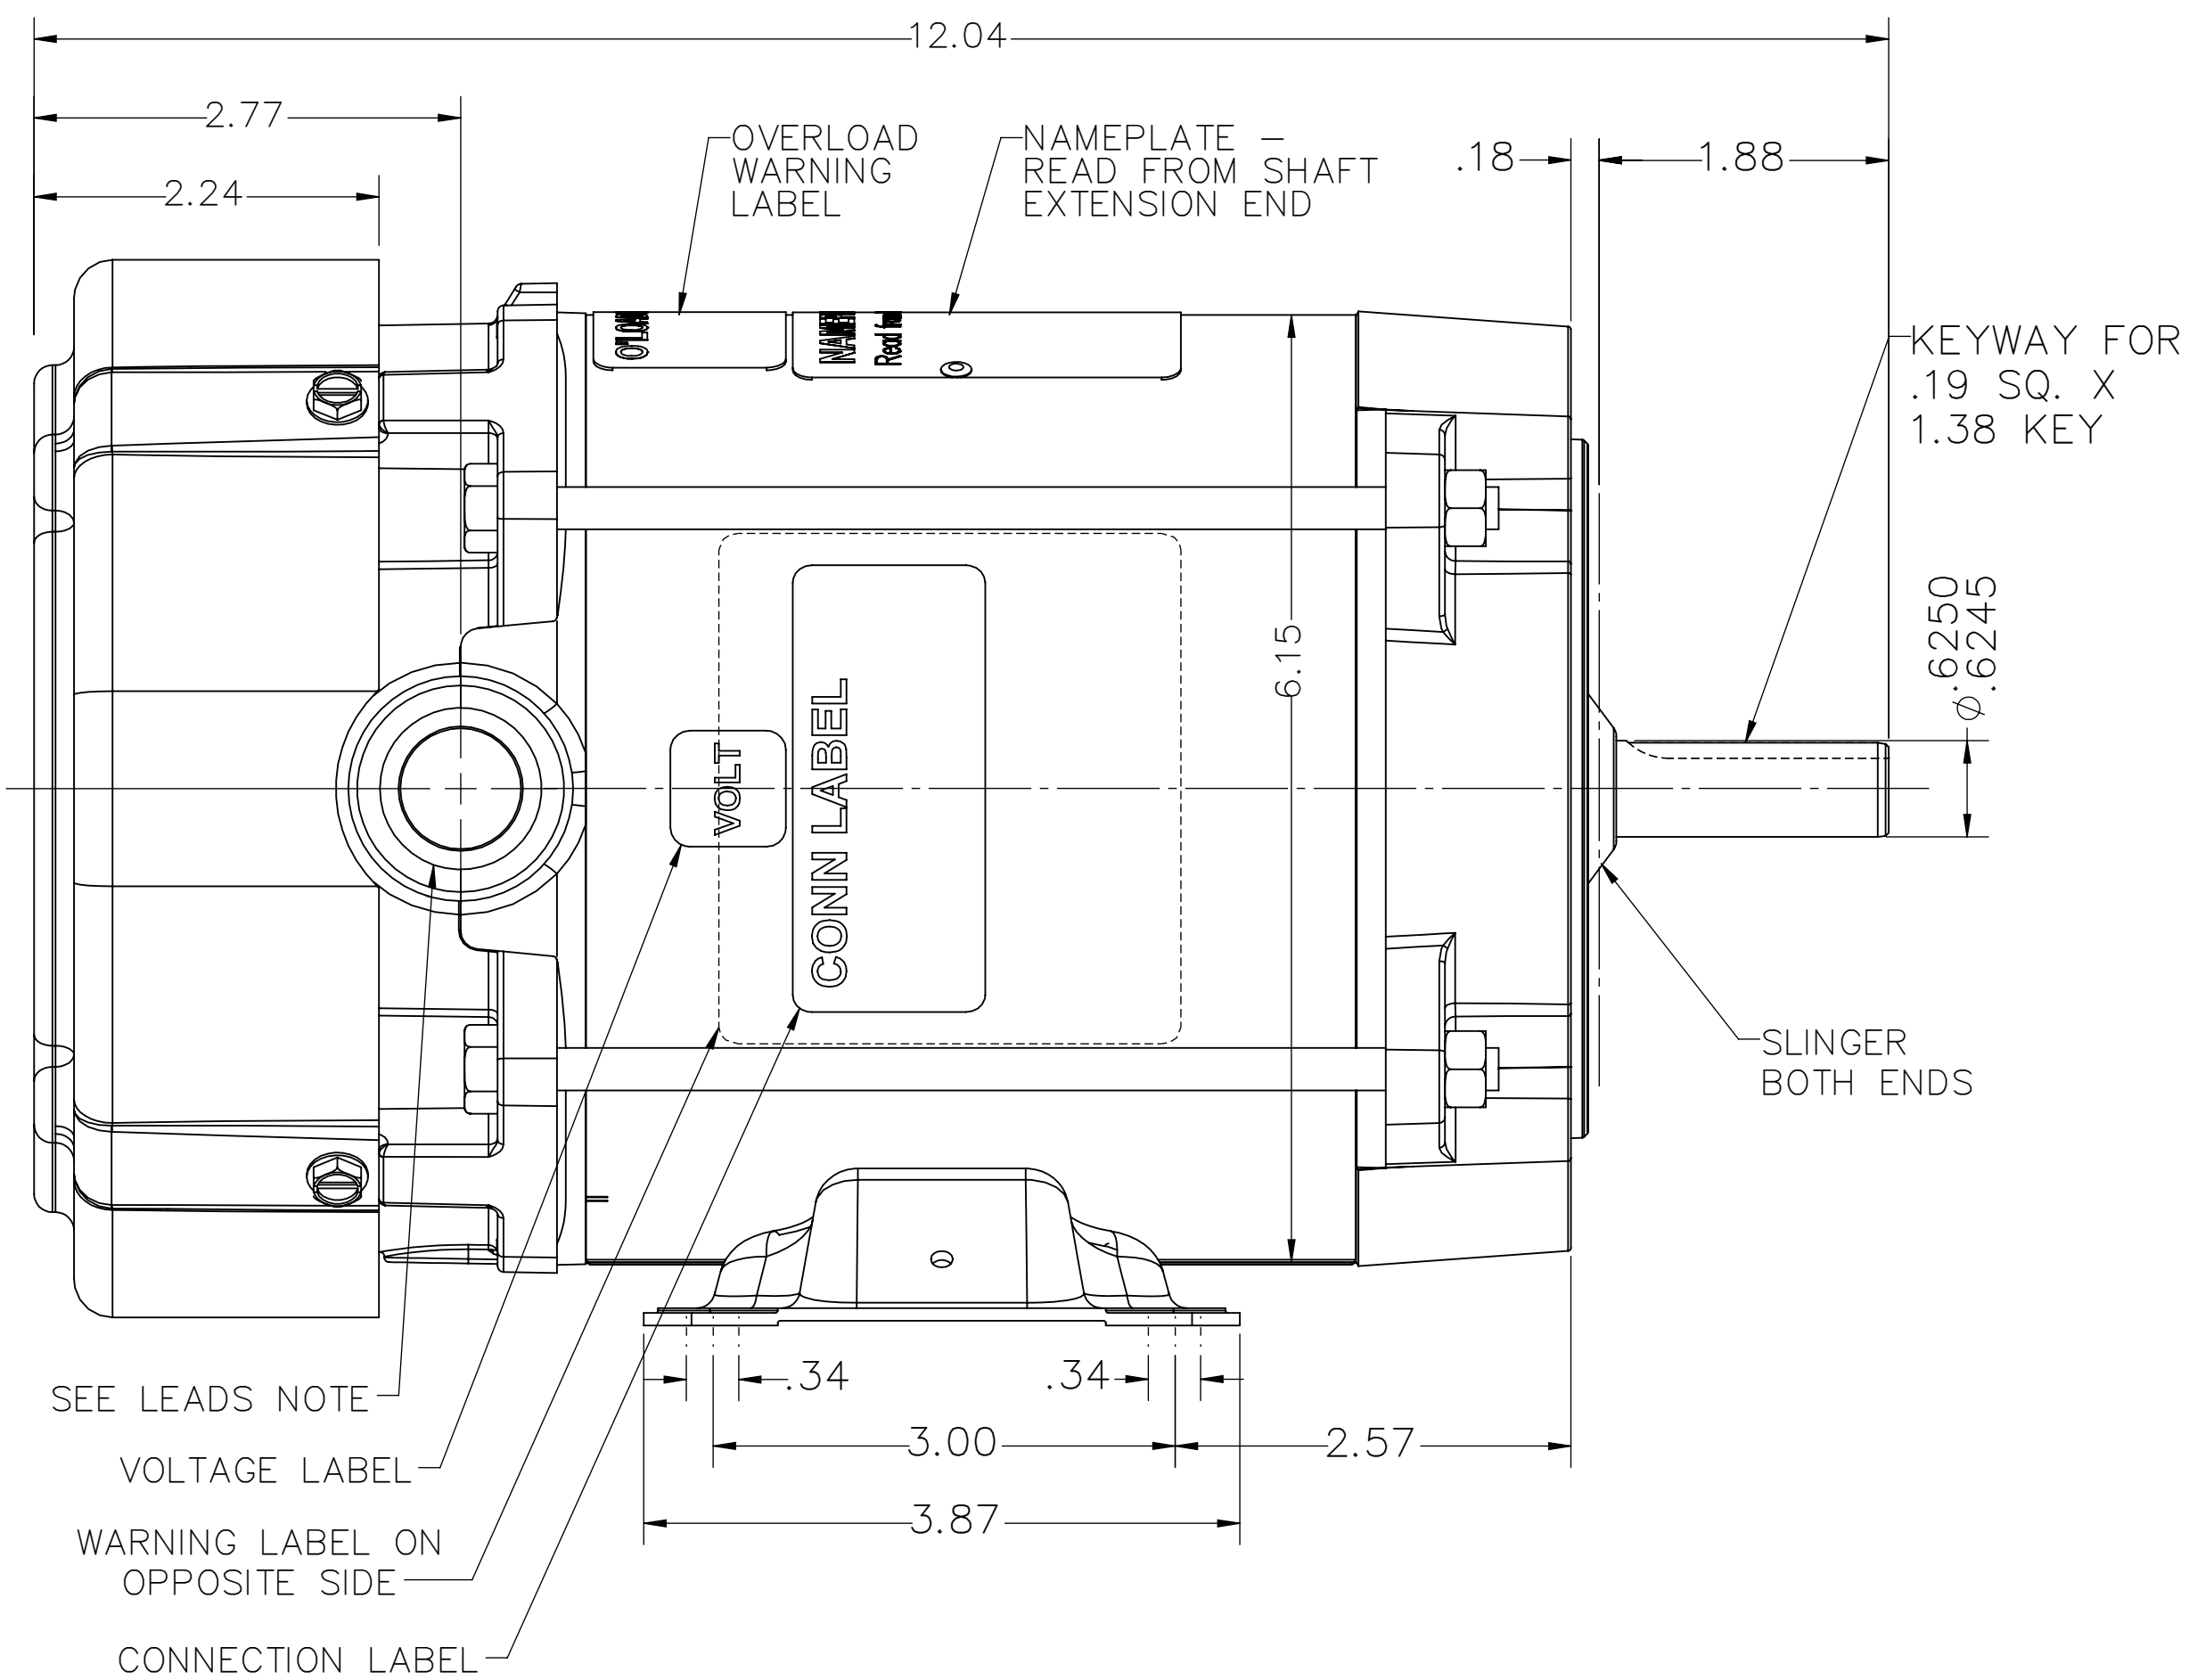

UNLESS OTHERWISE SPECIFIED DIMENSIONS
WITHOUT TOLERANCES ARE REFERENCE ONLY


NOTES

1. CONDUIT BOX SHIPPED UNASSEMBLED

LEADS

24" +2"-0" WITH .44" STRIPPING
FROM CONDUIT HUB

EXTERNAL CONNECTIONS

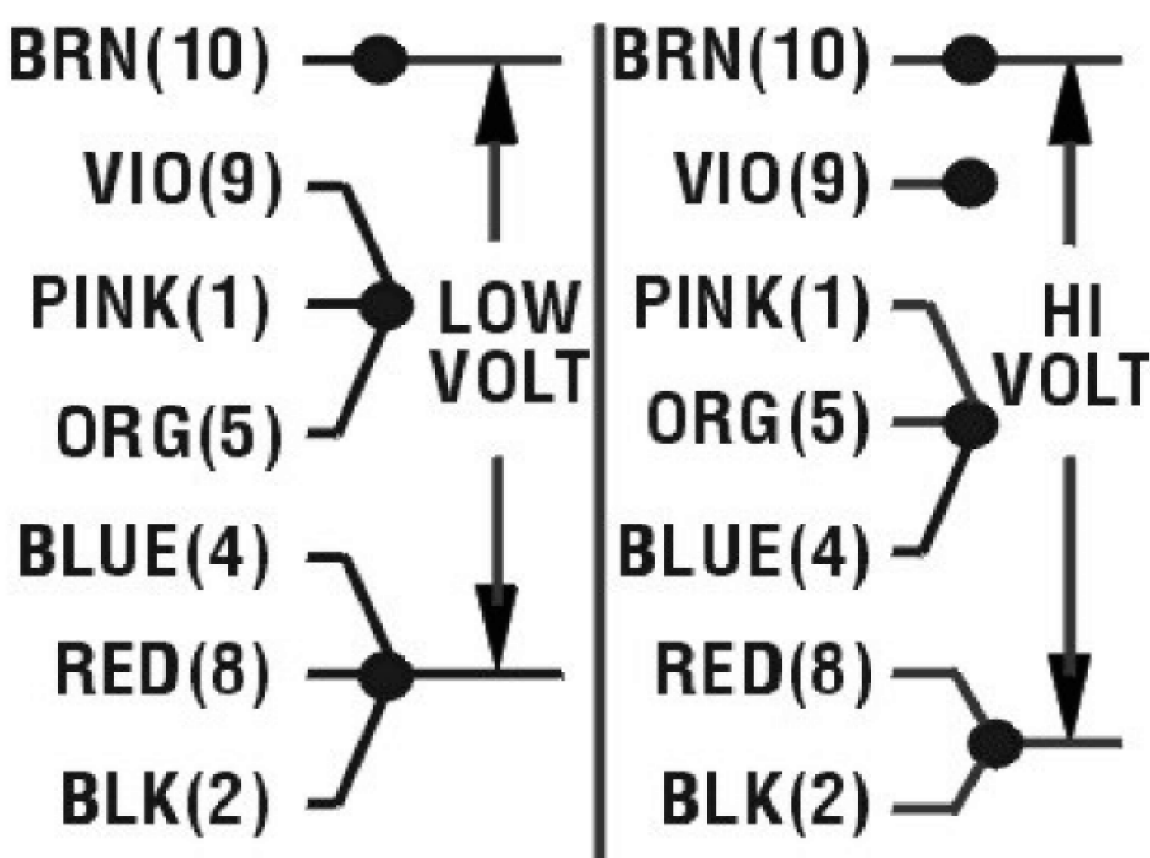

**TO REVERSE, INTERCHANGE
ORANGE(5) AND RED (8).**

MOTOR DATA

TYPE		CSIR		SHAFT MATERIAL		CRS		CUSTOMER NAME		WEG			
HZ		60		HZ		FRAME 56		PHASE 1		CUSTOMER PART NUMBER .5036XS1B56			
VOLTS		115/208–230		VOLTS		ENCLOSURE TEFC–XP		PAINT GRAY		VIEWING LEAD END	MOTOR ROTATION	REV	
HP 1/2		SF 1.0		HP –		SF		ENVIRONMENT NORMAL			BEARINGS BALL		ASSEMBLY ROTATION
RPM		3450		RPM –		I.P.CODE IP55		END CAP CANOPY		ASSEMBLY VOLTAGE		HIGH	
F.L. AMPS		6.8/3.4		F.L. AMPS		NEMA NOM. EFF. –%		IE3 –%		THERMAL PROTECTION TYPE		AUTOMATIC	
S.F. AMPS		–		S.F. AMPS –						MOUNTING POSITION		HORIZONTAL	
						MOTOR IS LISTED FOR HAZARDOUS LOCATIONS				WINDING AND TEST SPEC		334723	
TIME RATE		CONT		MAX AMB 50		CLASS I – II		TEMP CODE T3B		DRAWN: DGM 12/04/23		RELEASED:	
KVA CODE		L		INS CLASS F		GROUP C,D – E,F,G				APPROVED:			

ECN	REV	CHANGE DESCRIPTION	DATE / INITIALS
—	003	REBUILT IN SOLIDWORKS AND CHANGED EXT CONN DIAGRAM	12/01/23 DGM
THE INFORMATION DISCLOSED HEREIN INCLUDES PROPRIETARY RIGHTS OF WEG. ANY REPRODUCTION OR TRANSFERRAL OF INFORMATION FROM THIS DOCUMENT IS FORBIDDEN WITHOUT PRIOR CONSENT.			
SIZE D	DWG NO. 10007330423		
SCALE: 1:1	DO NOT SCALE DRAWING		SHEET 1 OF 1